

ORUM & ROTH
53 WEST JACKSON BOULEVARD
CHICAGO, ILLINOIS 60604-3606
312.922.6262 PHONE
312.922.7747 FAX

Attorney Docket Number: 10/049343 12888

1010 Rec'd PCT/PTO 06 FEB 2002 PATENTS

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)

International Application Number: PCT/CA00/00908

International Filing Date: 04 August 2000

Priority Date Claimed: 06 August 1999

Title of Invention: METHOD AND SYSTEM FOR THE RECUPERATION OF SEPTIC TANK CONTENT

Applicant(s) for DO/EO/US: GROUP SNS (SERVICE DE NETTOYAGE SANITAIRE) INC.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items under 35 U.S.C. 371:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
- ☒ This express request to immediately begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).
- ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
- ☒ A copy of the international Application as filed (35 U.S.C. 371(c)(2)):
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English
- ☐ Amendments to the claims of the International Application under PCT Article 19:
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has **NOT** expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19(35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)):
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ will follow.
10. ☐ A translation of the Annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
11. ☒ Copy of the:
 - a. ☒ International Preliminary Examination Report.
 - b. ☒ International Search Report.
12. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98
13. ☒ An Assignment document for recording with a separate cover sheet in compliance with 37 CFR 3.28 and 3.31.
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau
 - c. ☐ will follow.
14. ☐ A **FIRST** preliminary amendment.
15. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☒ A change of power of attorney and/or address letter.
18. ☒ Applicant claims Small Entry status

10/049565

JC13 Rec'd PCT/PTO 06 FEB 2002

19. ☐ Other items of information:
20. ☒ 19 Sheets of drawings are enclosed.
21. ☒ The U.S. National Fee (35 U.S.C. 371(c)(1)) and other fees as follows:

NATIONAL FEE (37 CFR 1.492):				TOTAL
<input type="checkbox"/>	Search Report has been prepared by the EPO or JPO (37 CFR 1.492 (a)(5))			\$890
<input type="checkbox"/>	International Preliminary Examination fee paid to USPTO (37 CFR 1.492(a)(1))			\$710
<input type="checkbox"/>	No International Preliminary examination fee paid to USPTO but international search fee paid to USPTO (37 CFR 1.492(a)(2))			\$740
<input checked="" type="checkbox"/>	Neither International Preliminary examination fee nor International Search fee (37 CFR 1.492(a)(3)) paid to USPTO			\$1,040
<input type="checkbox"/>	International Preliminary Examination fee paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)(37 CFR 1.492 (a)(4))			\$100
<input type="checkbox"/>	Surcharge for furnishing the oath of declaration later than 20 or 30 months from the earliest claimed priority date (37 CFR 1.492(e))			\$130
<input type="checkbox"/>	Processing fee for furnishing the English translation later than the 20 or 30 months from the earliest claimed priority date (37 CFR 1.492(f))			\$130
<input checked="" type="checkbox"/>	Assignment Recordal Sheet (37 CFR 1.21(L))			\$40

	Number of Claims Filed	Number of Claims Allowed	Number of Extra Claims	Rate per Extra Claim	
Total Number of Claims Filed	28	20	8	\$18	\$144
Number of Independent Claims Filed	5	3	2	\$80	\$160

	Yes	No	Rate per Application	
Number of Multiple Dependent Claims Filed	0		\$270	\$0

Total Fees Enclosed for Large Entity	\$1,040
Total Fees Enclosed for Small Entity (1/2 of Large Entity)	\$520

- a. ☒ A check in the amount of \$864 to cover the fee is enclosed.
- b. ☐ Please charge my deposit account \$ 0 to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, including request for extension and payment of extension fees due, when this is not explicitly requested by applicants, with a view toward avoidance of abandonment, to Deposit account No. 04-2219, referencing our docket # 12888 Any overpayment should be credited to this account.

Please direct all communication in connection with this application to the undersigned at:

ORUM & ROTH
53 WEST JACKSON BOULEVARD
CHICAGO, ILLINOIS 60604-3606

Keith H. Orum
Attorney for Applicant
Registration Number 33985

Andrew D. Babcock
Attorney for Applicant
Registration Number 44517

George F. Dvorak
Attorney for Applicant
Registration Number 17656

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this transmittal letter and the documents referred to as enclosed therein are being deposited with the United States Postal Service on 6 February 2002, in an envelope as "Express Mail Post Office Addressee", mailing label number EV024971526 US addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Brenda Campillo
Name of Person Mailing Paper

Signature of Person Mailing Paper

TITLE OF THE INVENTION

Method and system for the recuperation of septic tank
content

FIELD OF THE INVENTION

- 5 The present invention relates to the recuperation of septic tank content. More specifically, the present invention is concerned with a method and a system that enable the efficient recuperation of the sludge contained in septic tank.

BACKGROUND OF THE INVENTION

- 10 Owners of residences that are not connected to a conventional sewer system are often forced to comply with local regulation that requires them to install a septic tank.

- 15 So called, "Vacuum" type trucks were developed to literally suck up the sludge from the septic tank and then to dispose it in appropriate dumping sites. However, since the environmental norms have become more rigid in many countries, the management of sludge has become a problem that the governmental and municipal authorities have been trying to overcome. More specifically, means that would permit the reduction of these residual matters at the source, which
20 would promote their reuse as well as valorise them, are being searched.

Still, today considering the costs generated by the dumping of sludge in the appropriate sites and time wasted in transporting the sludge, many contract workers employed to recuperate the content of septic tanks refuse to conform to the regulations, and
5 therefore set up septic tanks almost everywhere in the environment. This, of course, can have unfortunate consequences.

Many technologies are currently available or known in this field. The following is a brief summary of these technologies.

Vacuum type truck

10 This is a system that uses a pump to empty the whole content of the septic tank. This system is generally well accepted by clients and operators, since no liquid is returned to the tank after the recuperation of the septic tank content is over. This system is the most widely used to this day. However, this system comprises several
15 drawbacks. For example, since all of the content must be recuperated and transported to the dumping site, the operation of this system is very expensive in transport and handling costs when the dumping site/plant is situated at a far distance from the client.

Dehydration type truck

20 This is a system that uses a pump as well as a centrifuge unit to generate dryer sludge. The system requires the use of chemical products such as coagulants and/or flocculants, and requires

also a longer treatment time. Although this process yields the dehydration of the sludge at 90% of the volume to be transported, the sludge is generally not sufficiently dehydrated to be dumped directly in the dumping sites. In addition, the sludge is usually too thick to be poured in a treatment plant, which renders their disposition in appropriate sites difficult. This technology also requires a bulky and long mobile unit, which limits the access to the septic tank. Another drawback of such a system is that it is expensive since the dehydration demands a lot of time and expensive chemical products. The mobile unit is also difficult to operate, hence more qualified labour is necessary.

Double chamber vacuum truck

Double chamber vacuum trucks include a pump that can return a portion of the liquid to the septic tank. The mobile unit sends back the water to the tank without having filtered it. The quantity of sludge to transport is therefore reduced since a portion of the liquid of the septic tank is returned to the tank after the sludge is removed. In addition, the process does not use chemical substances.

However, since no filtration is done before returning the liquid to the septic tank, there is no guarantee that the liquid that is returned does not contain sludge. There is no precise mechanism that indicates to the operator the quantity of sludge that has been retrieved or that has to be retrieved. Thus, the operator can only rely on his experience. Moreover, by returning the liquid that comprises suspended solid in the tank, it gives rise to a risk that, after an influx of

- water, the suspended solid will end up blocking the purification field. The consequences of such a block are significant, considering that a defective purification field should be reconstructed completely. Another important disadvantage is that the client is bound to a restrictive use of
- 5 water 12 to 24 hours following the draining of the tank, in order to limit the possibly harmful water influx.

SUMMARY OF THE INVENTION

- More specifically, in accordance with the present invention, there is provided a method for the recuperation of septic tank
- 10 content using a mobile recuperation unit having first and second reservoirs, the content of the septic tank including sludge, supernatant and scum, the method comprising:

- transferring a portion of the supernatant from the septic tank to the first reservoir of the mobile recuperation unit;
- 15 transferring the remainder of the content of the septic tank into the second reservoir of the mobile recuperation unit;
- filtering the supernatant; and
- transferring the filtered supernatant from the first reservoir back to the septic tank.

- 20 According to another aspect of the present invention, there is provided a system for the recuperation of septic tank content including sludge, supernatant and scum, the system comprising:

- a first reservoir;
- a second reservoir;

a bidirectional pump assembly having at least one pump suction pipe having a proximate end connected to a first port thereof; the pump assembly having a second port connected to the first reservoir and a third port connected to the second reservoir;

- 5 a filtering assembly provided between the second port and the first reservoir;

- 10 whereby, the bidirectional pump assembly is so controlled as to pump the supernatant from the septic tank into the first reservoir, filter this supernatant via the filtering assembly, pump the sludge and the scum to the second reservoir and pump back the filtered supernatant to the septic tank to thereby reduce the portion of the content of the septic tank remaining in the recuperation system.

- 15 According to a third aspect of the present invention, there is provided a system for the recuperation of septic tank content including sludge, supernatant and scum, the system comprising:

- a first reservoir;
- a first pump having an inlet and an outlet open to the first reservoir;
- 20 a first pump suction pipe having a proximate end connected to the inlet of the first pump;
- a filtering assembly associated with the first pump suction pipe;
- a second reservoir;

a second pump having an inlet and an outlet open to the second reservoir;

a second pump suction pipe having a proximate end connected to the inlet of the second pump;

- 5 whereby, a) the first pump may be so controlled as to pump the supernatant from the septic tank to the first reservoir, b) the filtering assembly may be so controlled to filter the pumped supernatant, c) the second pump may be so controlled as to pump the sludge and the scum to the second reservoir, and d) the first pump may be so
- 10 controlled as to pump back the filtered supernatant to the septic tank to thereby reduce the portion of the content of the septic tank remaining in the recuperation system.

- According to yet another aspect of the present invention, there is provided a system for the recuperation of septic tank content including sludge, supernatant and scum, the system comprising:
- 15

a first reservoir;

a first pump suction pipe having a proximate end connected to the first reservoir;

a second reservoir;

- 20 a second pump suction pipe having a proximate end connected to the second reservoir;

a vacuum pump connected to the first and second reservoirs.

a filtering assembly associated with the first reservoir;

whereby, a) the vacuum pump may be so controlled as to generate a partial vacuum in the first reservoir to pump the supernatant from the septic tank to the first reservoir, b) the filtering assembly may be so controlled to filter the pumped supernatant, c) the vacuum pump
5 may be so controlled as to generate a partial vacuum in the second reservoir to pump the sludge and the scum to the second reservoir, and d) the filtered supernatant may be returned to the septic tank via the first pump suction pipe to thereby reduce the portion of the content of the septic tank remaining in the recuperation system.

10

According to a fifth aspect of the present invention, there is provided a system for the recuperation of septic tank content including sludge, supernatant and scum, the system comprising:

15 a first reservoir;

a second reservoir;

means for pumping the supernatant into the first reservoir and the sludge and scum into the first reservoir; the pumping means being configured to allow the pumping back of the supernatant into the septic tank;

20 means for filtering the supernatant;

whereby, the system is so controlled as to pump the supernatant from the septic tank into the first reservoir via the pumping means, filter this supernatant via the filtering means, pump the sludge and the scum to the second reservoir and pump back the filtered
25 supernatant to the septic tank via the pumping means to thereby reduce

the portion of the content of the septic tank remaining in the recuperation system.

Other objects, advantages and features of the present invention will become more apparent upon reading of the following non
5 restrictive description of preferred embodiments thereof, given by way of example only with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the appended drawings:

Figure 1 is a schematic side elevational view of a
10 mobile recuperation unit for the recuperation of septic tank content according to a first embodiment of the present invention;

Figure 1A is a side elevational view of the nozzle of the mobile recuperation unit of Figure 1;

Figure 2 is a schematic side elevational view of the
15 mobile recuperation unit of Figure 1, shown during the pumping of the supernatant from a septic tank;

Figure 3 is a schematic side elevational view of the mobile recuperation unit of Figure 1, shown at the end of the pumping of the supernatant from the downstream compartment of the septic
20 tank;

Figure 4 is a schematic side elevational view of the mobile recuperation unit of Figure 1, shown during the pumping of the supernatant from the upstream compartment of the septic tank;

5 Figure 5 is a schematic side elevational view of the mobile recuperation unit of Figure 1, shown during the pumping of the sludge from the upstream compartment of the septic tank;

Figure 6 is a schematic side elevational view of the mobile recuperation unit of Figure 1, shown during the pumping of the sludge from the downstream compartment of the septic tank;

10 Figure 7 is a schematic side elevational view of the mobile recuperation unit of Figure 1, shown during the pumping back of the filtered supernatant in the septic tank;

Figure 8 is a schematic side elevational view of the mobile recuperation unit of Figure 1, shown after the supernatant has
15 been pumped back in the septic tank;

Figure 9 is a schematic side elevational view of a mobile recuperation unit for the recuperation of septic tank content according to a second embodiment of the present invention, shown during the pumping of the supernatant from the downstream
20 compartment of the septic tank;

Figure 9A is a side elevational view of the nozzle of the

mobile recuperation unit of Figure 9;

Figure 10 is a schematic side elevational view of the mobile recuperation unit of Figure 9, shown at the end of the pumping of the supernatant from the downstream compartment of the septic tank;

Figure 11 is a schematic side elevational view of the mobile recuperation unit of Figure 9, shown during the simultaneous pumping of the supernatant from the upstream compartment of the septic tank and the sludge from the downstream compartment of the septic tank;

Figure 12 is a schematic side elevational view of the mobile recuperation unit of Figure 9, shown during the pumping of the sludge from the upstream compartment of the septic tank;

Figure 13 is a schematic side elevational view of the mobile recuperation unit of Figure 9, shown during the pumping back of the filtered supernatant to the downstream compartment of the septic tank;

Figure 14 is a schematic side elevational view of the mobile recuperation unit of Figure 9, shown when the pumping back operation is completed;

Figure 15 is a schematic side elevational view of a

mobile recuperation unit for the recuperation of septic tank content according to a third embodiment of the present invention, shown during the pumping of the supernatant from the downstream compartment of the septic tank;

- 5 Figure 16 is a schematic side elevational view of the mobile recuperation unit of Figure 15, shown at the end of the pumping of the supernatant from the downstream compartment of the septic tank;

- 10 Figure 17 is a schematic side elevational view of the mobile recuperation unit of Figure 15, shown during the simultaneous pumping of the supernatant from the upstream compartment of the septic tank and the sludge from the downstream compartment of the septic tank;

- 15 Figure 18 is a schematic side elevational view of the mobile recuperation unit of Figure 15, shown during the pumping of the sludge from the upstream compartment of the septic tank; and

- 20 Figure 19 is a schematic side elevational view of the mobile recuperation unit of Figure 15, shown during the pumping back of the filtered supernatant to the downstream compartment of the septic tank.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The present innovation helps to resolve the above-noted problems encountered by the present technologies by the elaboration of a method and a system, i.e., a mobile unit, for the recuperation of septic tanks content.

As will generally be understood upon reading the following description, the method and system of the present invention allow a considerable reduction of the costs involved in the recuperation of septic tank content while respecting the usual environmental norms.

As is commonly known, in a standard septic tank, the settleable sludge deposits with time at the bottom thereof. Supernatant less contaminated is present at the surface of the sludge and scum is found at the surface of the supernatant.

In a nutshell, the present invention aims at removing the major portion of the supernatant while minimising the contamination thereof by the sludge and the scum. Once the sludge and the scum are removed from the septic tank, the filtered supernatant may be returned to the tank to thereby a) reduce the volume of the waste material to be transported to a disposal site, and b) reintroduce the natural microflora to the septic tank to thereby increase its efficiency.

Turning now to Figure 1 of the appended drawings, a mobile recuperation unit 20 according to a first embodiment of the system of the present invention will be described.

The mobile recuperation unit 20 comprises a flatbed truck 22 and a sludge recuperation assembly 24 including a sludge reservoir 26, a supernatant reservoir 28 and a pumping sub-assembly 30.

Of course, since the flatbed truck 22 is mainly used to transport the sludge recuperation assembly 24 it could be replaced by other transporting means.

The pumping sub-assembly 30 includes a pump suction pipe 32, usually formed of many sections placed end to end, an electrically controlled three-way bi-directional bypass/pump 34 and a filtering mechanism 36 including a controller 38 as will be described hereinbelow.

As it can be clearly seen in Figure 1A, the distal end of the pump suction pipe 32 is provided with a supernatant sucking nozzle 40 allowing the supernatant to be laterally sucked to thereby limit the mixing of the solid matter with the supernatant to be recuperated, thereby limiting the solid matter content of the supernatant. Indeed, the nozzle 40 includes lateral apertures 42. The end 44 of the nozzle 40 has a generally conical shape to advantageously facilitate the breakage

of the scum formed at the top of the supernatant, as will be described hereinafter.

It is to be noted that the lateral apertures 42 are provided with a wire mesh to prevent large suspended matter to go
5 through.

Returning to Figure 1, the proximate end of the pipe 32 is connected to the main port 46 of the three-way bypass/pump 34.

The three secondary ports 48, 50 and 52 of the bypass/pump 34 are connected to the sludge reservoir 26, the bottom of
10 the supernatant reservoir 28 and to the filtering mechanism 36, via pipes 49, 51 and 53, respectively. The electrical connection between the controller 38 and the bypass/pump 34 enables the controller 38 to select to which of the secondary ports 48-52 the main aperture 46 is connected.

15 The filtering mechanism 36 includes a hopper-like portion 58, a continuous filter 60, mounted on a dispenser 61, going through the hopper 58, rollers 62 to support the filter 60, an electric motor 64 controlled by the controller 38, and a shredder 66 having its output connected to the sludge reservoir 26. First and second liquid
20 sensors 68 and 70 are also provided in the hopper 58 and connected to the controller 38. The purpose of the sensors 68 and 70 will be described hereinafter.

As will be discussed hereinbelow, the sludge recuperation assembly 24 is designed to recuperate the content of septic tanks, such as, for example, septic tank 72.

The septic tank 72 includes an upstream compartment 74 and a downstream compartment 76, both containing sludge 78, supernatant 80 and a scum 82; an inlet 84 and an outlet 86. Access to the upstream compartment 74 is allowed through an opening 88 while the access to the downstream compartment 76 is given via an opening 90 which are conventionally closed by lids (not shown).

The operation of the sludge recuperation assembly 24 will now be described with respect to Figures 1 to 8 of the appended drawings.

Figure 1 of the appended drawings illustrates the first step of the recuperation according to the first embodiment of the present invention. Prior to this illustrated first step, the lids (not shown) of the openings 88 and 90 have been removed therefrom and the pump suction pipe 32 has been assembled.

This first step is therefore the insertion of the distal end of the pipe 32, including the nozzle head 40, into the downstream compartment 76, under the scum 82. The controller 38 then controls the bypass/pump 34 so as to transfer a portion of the supernatant 80 from the downstream compartment 76 to the hopper 58 (see arrows 92, 94, 96 and 98). The filtering medium 60 removes the suspended matter

contained in the supernatant 80 since the supernatant has to go through the filtering medium 60 to reach the supernatant reservoir 28.

It is to be noted that the supernatant is removed from the top, below the scum level, to the bottom, above the sludge level, to thereby minimise the mixing effects which reduces the amount of suspended matter in the supernatant. While the portion of the supernatant that is transferred from the tank 72 to the reservoir 28 may vary, the use of the sludge recuperation assembly 24 allows the transfer of most of the supernatant.

Figure 2 illustrates the operation of the filtering mechanism 58. Since the purpose of the filtering medium 60 is to remove the suspended matter contained in the supernatant, solid matter will accumulate on top of the filtering medium 60 to thereby clog it. When this happens, the supernatant level into the hopper 58 rises until it reaches the first liquid sensor 68. This signal is sent to the controller 38 that activates the motor 64 that pulls a predetermined length of the filtering medium 60 from the dispenser 61 (see arrow 100). The spent portion of the filtering medium 60 is passed through the shredder 66 and the shredded filter is released into the sludge reservoir 26 since it is advantageously made of biodegradable material. Should it be made of non-biodegradable material, it could be stored in another reservoir (not shown) for ulterior disposal.

This pulling of a predetermined length of filtering medium 60 from the dispenser 61 brings a fresh filtering medium in at

least a portion of the hopper 58, thereby allowing supernatant 80 therethrough, which causes the supernatant level to fall below the first sensor level.

Figure 3 of the appended drawings illustrates the end
5 of the pumping of the supernatant 80 from the downstream compartment 76 of the tank 72. As will easily be understood by one skilled in the art, this supernatant will contain more suspended matter, even though the water is laterally sucked by the nozzle 40.

As described hereinabove with respect to Figure 2,
10 when the supernatant level into the hopper 58 reaches the first sensor 68, the motor 64 is activated to change at least a portion of the filtering medium 60. However, when the quantity of suspended matter in the supernatant reaches a critical level, the supernatant level in the hopper 58 will reach the second liquid sensor 70 and this signal will be
15 monitored by the controller 38. Indeed, when the quantity of suspended matter in the supernatant is too high, the replacement of a portion of the filtering medium 60 will not be sufficient to lower the supernatant level sufficiently in the hopper 58.

The controller 38 may be configured to handle this
20 information in two different manners. First, it may control the bypass/pump 34 so that the remainder of the supernatant is pumped in the sludge reservoir 26 (see dashed arrows 102 and 104) until the user determines that enough supernatant has been removed in this step. Secondly, it may stop the pumping process completely, thereby

indicating to the user that only sludge remains in this compartment. Of course, in these two scenarios, the motor 64 is energized so as to place a new filtering medium in the hopper 58 and to empty the hopper from the supernatant contained therein.

5 The next step, illustrated in Figure 4, is to remove the supernatant remaining in the upstream compartment 74. To achieve this supernatant recuperation, the distal end of the pump suction pipe 32 is inserted in the upstream compartment 74 via the opening 88. Again, the supernatant is pumped in the supernatant reservoir 28 (see
10 arrows 92, 94, 96 and 98). Of course, the filtering mechanism 36 operates as described hereinabove with respect to Figures 2 and 3.

Turning now to Figure 5 of the appended drawings, the next step is the removal of the sludge 78, of the remainder of the supernatant 80 and of the scum 82 from the upstream compartment 74
15 of the tank 72.

The nozzle head 40 (see Figures 1-3) is therefore removed from the distal end of the pump suction pipe 32 and the controller 38 instructs the bypass/pump 34 to pump the remaining content of the compartment 74 directly into the sludge reservoir 26 (see
20 arrows 106, 108, 110 and 112). Of course, no filtering takes place at this stage.

The same procedure is applied to remove the remaining content (sludge, supernatant and scum) from the downstream container 76, as can be seen from Figure 6.

After the step illustrated in Figure 6 is completed, the recuperation of the content of the tank 72 is over. However, since the filtered supernatant and the sludge have been recuperated separately, the filtered supernatant contained in the supernatant reservoir 28 may be returned in the tank 72 as illustrated in Figure 7. It has been found advantageous to replace the nozzle head 40 to the distal end of the pump suction pipe 32 and to position the nozzle head 40 at the bottom of the tank 72 to thereby minimize the stirring action of the forcefully returning water into the tank which may still contain some solid matter.

The controller 38 thereby controls the bypass/pump 34 to draw the supernatant from the reservoir 28 via the pipe 51 to return it to the tank 72 (see arrows 114, 116, 118 and 120).

Of course, as will easily be understood by one skilled in the art, the filtered supernatant could be returned to the septic tank by gravity via an aperture (not shown) provided at the bottom of the reservoir 28, therefore not necessitating the use of the pump 32 for this task.

Finally, Figure 8 shows the result of the method described hereinabove where the filtered supernatant has been returned to the septic tank 72.

It is to be noted that while the description hereinabove of the operation of the mobile recuperation unit 20 has been given with respect to a septic tank 72, having both its opening 88 and 90 exposed and accessible, this is not a required feature. Indeed, should only the opening 88 be exposed, the main portion of the content of the tank 72 could still be recovered.

It is also to be noted that even though the above description states that the downstream compartment 76 is emptied before the upstream compartment 74, this order could be reversed without departing from the spirit and nature of the present invention.

As will easily be understood by one skilled in the art, the filtering mechanism 36 could be replaced by an other type of filter to remove the suspended matter in the supernatant. For example, bag filters, membrane filters, sand filters, cartridge filters, centrifugal filters or other appropriate type of filters could be used. Furthermore, other filtering technologies such as, for example, a clarifier could be used to remove the suspended matter in the supernatant.

Turning now to Figures 9 to 14 of the appended drawings, a mobile recuperation unit 200 according to a second embodiment of the present invention will be described.

The mobile recuperation unit 200 comprises a flatbed truck 202 and a sludge recuperation assembly 204 including a sludge

reservoir 206, a supernatant reservoir 208 and a pumping sub-assembly 210.

The pumping sub-assembly 210 includes a first pump suction pipe 212, usually formed of many sections connected end to end and having a relatively large diameter. The pipe 212 is connected to the sludge reservoir 206 by a first pump 214.

The pumping sub-assembly 210 also includes a second pump suction pipe 216 having a relatively small diameter. The pipe 216 is connected to a bypass 218 that allows the connection of the pipe 216 to the sludge reservoir 206 via pipe 220 and to the supernatant reservoir 208 via a pipe 222, a filtering mechanism 224 and a submersible pump 226. The filtering mechanism 224, which will be described in greater detail hereinbelow, includes a return pipe 228 to the sludge reservoir 206. The bypass 218 and the pipe 220 define a bypass assembly used to divert the flow of supernatant to the sludge reservoir as will be described hereinbelow.

Since the second pump suction pipe 216 has a generally small diameter, it may be mounted to a hose reel (not shown) for convenient storage.

A controller 230 is also provided to control the pumps 214 and 226, the bypass 218 and the filtering mechanism 224. A sensor 232 is also connected to the controller 230 to indicate the water turbidity to the controller 230, as will be described hereinafter.

Of course, other types of sensors could be used to detect the level of solid matter present in suspension in the supernatant.

As will be apparent to one skilled in the art upon reading the following description, the first pipe 212 is used to recuperate the sludge 78 and the scum 82 while the second smaller pipe 214 is used to recuperate the supernatant 80. Therefore, the distal end of the smaller pipe 214 is provided with a supernatant sucking nozzle head 234 which can be better seen from Figure 9A. The nozzle 234 allows the supernatant 80 to be laterally sucked to thereby limit the content of solid matter to be recuperated therethrough. Indeed, the nozzle 234 includes lateral apertures 236. The end 238 of the nozzle 234 has a generally conical shape to advantageously ease the breakage of the scum formed at the top of the supernatant, as will be described hereinafter. The nozzle head 234 also includes a floating element 240 which is configured and sized to keep the lateral apertures 236 just below the scum level to thereby minimize the pumping of solid matter therethrough.

Again, it is to be noted that the lateral apertures 236 are provided with a wire mesh to prevent large suspended matter to go through.

With reference to Figures 9 to 14, the operation of the sludge recuperation assembly 204, according to a second embodiment of the method of the present invention, will be described. It is to be noted that the basic goals of the method described hereinabove with

respect to Figures 1 to 8 are reached with the method that is about to be described. Indeed, the goal is still to separately recuperate the supernatant and the sludge to allow the return of the filtered supernatant to the tank 72 once the removal of the sludge therefrom is completed.

It is to be noted that since the septic tank illustrated in Figures 9 to 14 is identical to the tank of Figures 1 to 9, the same reference numerals for this tank 72 will be used.

The first step in the recuperation method, which is illustrated in Figure 9, is to recuperate the supernatant from the downstream compartment 76 of the tank 72. To achieve this, the nozzle head 234 is inserted through the aperture 90 and used to break the scum 82 to reach the supernatant 80. The floating element 240 allows the supernatant recuperation to be done without the supervision of the operator, allowing the user to simultaneously assemble the various sections forming the pipe 212 (which is already shown assembled in the appended figures) to thereby reduce the total time required to empty the septic tank 72.

Arrows 242, 244, 246 and 248 show the path of the supernatant when it is pumped into the supernatant reservoir 208 by the sucking action of the submersible pump 226. As shown in Figure 9, the controller controls the bypass 218 so that the supernatant is directed towards the supernatant reservoir 208.

It is to be noted that, at this stage, the supernatant is not filtered. As will be described hereinbelow, in this embodiment of the method of the present invention, the filtration is done immediately prior to the transfer of the supernatant back to the tank 72.

5 Figure 10 illustrates the end of the removal of the supernatant from the downstream compartment 76. As discussed hereinabove, the suspended matter content of the supernatant remaining in the downstream compartment 76 increases when the bottom portion of the compartment 76 is reached. This increases the
10 turbidity of the supernatant. The sensor 232 continuously monitors the turbidity of the supernatant and supplies this data to the controller 230. When the turbidity level reaches a predetermined and programmable limit, the controller 230 directs the supernatant to the sludge reservoir 206 via the bypass 218 and the pump 214 (see arrows 242, 244, 250,
15 252 and 254), or stops the pump.

In Figure 11, two steps are done simultaneously.

First, the relatively large diameter pipe 212 is used to recuperate the sludge 78, the remaining supernatant 80 and the scum 82 from the downstream compartment 76 of the tank 72 and to pump
20 this content in the sludge reservoir 206 (see arrows 256, 258, 260 and 262) via pump 214 controlled by the controller 230.

Secondly, the nozzle head 234 is inserted in the upstream compartment 74 via the aperture 88 to break the scum 82 and

recuperate the supernatant 80 therefrom via the submersible pump 226 (see arrows 264, 266, 268, 270 and 272). Of course, the turbidity of the supernatant is monitored by the sensor 232, as discussed hereinabove.

- When the major portion of the supernatant is
- 5 recuperated from the upstream compartment 74, the relatively large diameter pipe 212 is inserted in this compartment to remove the remainder of its content, i.e. the sludge 78, the supernatant 80 and the scum 82 (see Figure 12). The pump 214 is used to transfer this content to the sludge compartment 206 (see arrows 274, 276, 278 and 280).
- 10 While this is done, the smaller diameter pipe 216 may be positioned in the downstream compartment for the subsequent pumping of the supernatant back in the tank 72.

- Figure 13 illustrates this supernatant transfer back to the tank 72 step from the supernatant reservoir 208. The controller 230
- 15 energizes the pump 226 so that the flow of the supernatant is directed towards the tank 72 (see arrows 282 and 284). The controller 230 also energizes the filtering mechanism 224 to thereby filter the supernatant before it is returned to the tank 72. The filtered suspended matter (not shown) is returned to the sludge reservoir 206 via the pipe 228 (see
- 20 arrow 286. The filtered supernatant is thus returned to the tank 72 (see arrows 288, 290 and 292). Since the nozzle head 234 floats, the operator may take this pumping time to disassemble the pipe 212 to thereby reduce the total time required for the recuperation operation.

Again, as will easily be understood by one skilled in the art, the filtering mechanism 224 may use different known technologies to remove the suspended matter in the supernatant. For example, bag filters, membrane filters, sand filters, cartridge filters, centrifugal filters or other appropriate type of filters could be used. Furthermore, other filtering technologies such as, for example, a clarifier could be used to remove the suspended matter in the supernatant.

Finally, Figure 14 illustrates the result of the operation, when the supernatant is fully returned to the tank 72.

Of course, as will readily be understood by one skilled in the art, the filtering mechanism 224 could be replaced by a filtering mechanism 36 as illustrated in Figures 1 to 8 to filter the supernatant before it reaches the supernatant reservoir 208.

The filtering mechanism 224 could also include a pre-filtering assembly (not shown) to remove the relatively large solid particles when the supernatant is transferred to the supernatant reservoir 208 and, as discussed hereinabove, a filter to remove the smaller solid particles in suspension therein when the supernatant is transferred back to the tank 72.

Turning now to Figures 15 to 19 of the appended drawings, a mobile recuperation unit 300 according to a third embodiment of the present invention will be described.

The mobile recuperation unit 300 comprises a flatbed truck 302 and a sludge recuperation assembly 304 including a sludge reservoir 306, a supernatant reservoir 308 and a pumping sub-assembly 310.

- 5 The pumping sub-assembly 310 includes a first pump suction pipe 312, usually formed of many sections connected end to end and having a relatively large diameter. The pipe 312 is connected to the sludge reservoir 306.

- 10 The pumping sub-assembly 310 also includes a second pump suction pipe 314 having a relatively small diameter. The pipe 314 is connected to a pre-filter 316 that allows the connection of the pipe 314 to the supernatant reservoir 308. The pre-filter 316 includes a return pipe 318 to the sludge reservoir 306. Therefore, the relatively large solid matter recuperated by the pre-filter 316 are
15 transferred to the sludge reservoir 306.

Since the second pump suction pipe 314 has a generally small diameter, it may be mounted to a hose reel (not shown) for convenient storage.

- 20 The pumping sub-assembly 310 further includes a vacuum pump 320 connected to the reservoirs 306 and 308 by electrically controlled valves 322 and 324, respectively.

A turbidity sensor 326 is associated with the pipe 314 to determine the turbidity of the supernatant as discussed hereinabove with respect to Figures 9-14.

5 A filter 328 is also provided to filter the supernatant before it is returned to the septic tank, as will be described hereinbelow. This filter 328 is connected to a lower outlet (not shown) of the supernatant reservoir 308 via an electrically controlled valve 330.

A controller 332 is also provided to control the vacuum pump 320, the valves 322, 324 and 330 and the pre-filter 316.

10 As will be apparent to one skilled in the art upon reading the following description, the first pipe 312 is used to recuperate the sludge 78 and the scum 82 while the second smaller pipe 314 is used to recuperate the supernatant 80. Therefore, the distal end of the smaller pipe 314 is provided with a supernatant sucking nozzle head
15 234 identical to the nozzle head discussed hereinabove with respect to Figures 9-14.

As will easily be understood by one skilled in the art, the vacuum pump is used to create a partial vacuum in the reservoirs 306 and 308 via the valves 322 and 324. This partial vacuum will
20 create a suction in the corresponding pipe to thereby draw the content from the septic tank 72 as will be described in greater detail hereinbelow.

With reference to Figures 15 to 19, the operation of the sludge recuperation assembly 304, according to a third embodiment of the method of the present invention, will be described. Again, the goal is to separately recuperate the supernatant and the sludge to allow the return of the filtered supernatant to the tank 72 once the removal of the sludge therefrom is completed.

It is to be noted that since the septic tank illustrated in Figures 15 to 19 is identical to the tank of Figures 1 to 9, the same reference numerals for this tank 72 will be used.

The first step in the recuperation method, which is illustrated in Figure 15, is to recuperate the supernatant from the downstream compartment 76 of the tank 72. To achieve this, the nozzle head 234 is inserted through the aperture 90 and used to break the scum 82 to reach the supernatant 80. The floating element 240 allows the supernatant recuperation to be done without the supervision of the operator, allowing the simultaneous assembly of the various sections forming the pipe 312 (which is already shown assembled in the appended figures) to thereby reduce the total time required to empty the septic tank 72.

Arrows 334, 336 and 338 show the path of the supernatant when it is pumped in the supernatant reservoir 308 by the sucking action of the partial vacuum created in the reservoir 308 by the vacuum pump 320 (see arrow 340). The controller 332 therefore

energizes the pump 320 and opens the valve 324 to create this depressurization of the reservoir 308.

It is to be noted that, at this stage, the supernatant is only pre-filtered by the pre-filter 316 that removes the large solid elements from the supernatant but not the suspended matter therein. As will be described hereinbelow, in this third embodiment of the method of the present invention, the filtration is done immediately prior to the return of the supernatant to the tank 72.

Figure 16 illustrates the end of the removal of the supernatant from the downstream compartment 76. As discussed hereinabove, the suspended matter content of the supernatant remaining in the downstream compartment 76 increases when the bottom portion of the compartment 76 is reached. This increases the turbidity of the supernatant. The sensor 326 continuously monitors the turbidity of the supernatant and supplies this data to the controller 332. When the turbidity level reaches a predetermined and programmable limit, the controller 332 stops the recuperation of the supernatant by closing the valve 324 and/or by stopping the vacuum pump 320.

The solid matter recuperated by the pre-filter is transferred to the sludge reservoir 306, when required, via the return pipe 318 (see arrow 342).

In Figure 17, two steps are done simultaneously.

First, the relatively large diameter pipe 312 is used to recuperate the sludge 78, the remaining supernatant 80 and the scum 82 from the downstream compartment 76 of the tank 72 and to pump this content in the sludge reservoir 306 (see arrows 344, 346 and 348) via the sucking action of the partial vacuum created in the reservoir 308 by the vacuum pump 320 (see arrow 350).

Secondly, the nozzle head 234 is inserted in the upstream compartment 74 via the aperture 88 to break the scum 82 and recuperate the supernatant 80 (see arrows 352, 336 and 338) therefrom via sucking action of the partial vacuum created in the reservoir 308 by the vacuum pump 320 (see arrow 340). Of course, the turbidity of the supernatant is monitored by the sensor 326, as discussed hereinabove.

To simultaneously draw the content of the tank 72 via pipes 312 and 314, the two valves 322 and 324 are opened by the controller 332 and the vacuum pump 320 is energised.

As can be seen in Figure 18, when the major portion of the supernatant is recuperated from the upstream compartment 74, the relatively large diameter pipe 312 is inserted in this compartment to remove the remainder of its content, i.e. the sludge 78, the supernatant 80 and the scum 82 (see Figure 12). The vacuum pump 320 is used as discussed hereinabove to transfer this content to the sludge compartment 306 (see arrows 354, 346 and 348).

While this is done, the smaller diameter pipe 314 may be disconnected from the pre-filter 316 and connected to an output (not shown) of the filter 328. The distal end of the pipe 314 may be positioned in the downstream compartment 76 for the subsequent transfer of the supernatant back in the tank 72.

Finally, Figure 19 illustrates this supernatant transfer back to the tank 72 step from the supernatant reservoir 308 (see arrow 356). The controller 332 opens the valve 330 to allow a flow of supernatant therethrough. Optionally, the vacuum pump 320 may be energized to create a positive pressure (see arrow 358) in the reservoir 308 to thereby increase the speed of the supernatant transfer.

The supernatant goes through the filter 328 prior to its return to the tank 72 to remove the suspended matter contained therein. Again, the filtered suspended matter (not shown) is returned to the sludge reservoir 306 via a pipe (not shown). The filtered supernatant is thus returned to the tank 72 (see arrows 356, 360 and 362). Since the nozzle head 234 floats, the operator may take this pumping time to disassemble the pipe 312 to thereby reduce the total time required for the recuperation operation.

Again, as will easily be understood by one skilled in the art, the filter 328 may use different known technologies to remove the suspended matter in the supernatant. For example, bag filters, membrane filters, sand filters, cartridge filters, centrifugal filters or other appropriate type of filters could be used. Furthermore, other filtering

technologies such as, for example, a clarifier could be used to remove the suspended matter in the supernatant.

As will readily be apparent to one skilled in the art, the various features of the three embodiments described hereinabove could be interchanged at will without departing from the spirit and nature of the present invention.

The method and system of the present innovation offers several advantages, such as:

- the recuperation of the supernatant from the top of the septic tank to the bottom thereof, to thereby reduce the turbidity of the recuperated supernatant;
- the return of filtered supernatant to the septic tank to thereby ensure the return of a clear liquid, relatively exempt of suspended solid particles;
- the system, by not being voluminous, facilitates the access to the septic tank;
- the system is easily operated;
- the system has a great operation autonomy before it becomes necessary for the unit to go to the dumping site, therefore reducing significantly transport, labour and dumping costs;

- by developing a mobile recuperation unit with low exploitation cost and high efficiency, it supplies the septic tank workers with the necessary tool to help them manage the sludge more efficiently while still reducing environmental impacts;

5 - the method does not require the use of chemical products; and

- the return of the filtered supernatant to the septic tank permits the regeneration of the septic tank's microflora, which is beneficial and generally encouraged by governmental authorities.

10 Although the present invention has been described hereinabove by way of preferred embodiments thereof, it can be modified, without departing from the spirit and nature of the subject invention as defined in the appended claims.

WHAT IS CLAIMED IS:

1. A method for the recuperation of septic tank content using a mobile recuperation unit having first and second reservoirs, the content of the septic tank including sludge, supernatant and scum, said
5 method comprising:

transferring a portion of the supernatant from the septic tank to the first reservoir of the mobile recuperation unit;

transferring the remainder of the content of the septic tank into the second reservoir of the mobile recuperation unit;

10 filtering the supernatant; and

transferring the filtered supernatant from the first reservoir back to the septic tank.

2. The method for the recuperation of septic tank content
15 as recited in claim 1, wherein said filtering step is done during the transfer of the supernatant from the septic tank to the first reservoir of the mobile recuperation unit.

3. The method for the recuperation of septic tank content
20 as recited in claim 1, wherein said filtering step is done during the transfer of the supernatant from the first reservoir back to the septic tank.

4. The method for the recuperation of septic tank content as recited in claim 1, wherein said transferring step of the supernatant from the septic tank to the first reservoir of the mobile recuperation unit is done from the top, below the scum level, to the bottom, above the
5 sludge level, of the septic tank.

5. The method for the recuperation of septic tank content as recited in claim 4, wherein said transferring step of the supernatant from the septic tank to the first reservoir of the mobile recuperation unit
10 is done until the amount of suspended matter in the supernatant transferred exceeds a predetermined level.

6. The method for the recuperation of septic tank content as recited in claim 1, wherein said transfer steps are done by at least
15 one pump.

7. The method for the recuperation of septic tank content as recited in claim 6, wherein said at least one pump includes a vacuum pump.

8. The method for the recuperation of septic tank content as recited in claim 1, wherein said filtering step is done using a filtering method selected from the group consisting of bag filtering, membrane filtering, sand filtering, cartridge filtering, centrifugal filtering and clarifying filtering.
20

25

9. The method for the recuperation of septic tank content as recited in claim 1, further comprising the step of pre-filtering the supernatant during the transfer of the supernatant from the septic tank to the first reservoir.

5

10. A system for the recuperation of septic tank content including sludge, supernatant and scum, said system comprising:

a first reservoir;

a second reservoir;

10 a bidirectional pump assembly having at least one pump suction pipe having a proximate end connected to a first port thereof; said pump assembly having a second port connected to said first reservoir and a third port connected to said second reservoir;

15 a filtering assembly provided between said second port and said first reservoir;

20 whereby, said bidirectional pump assembly is so controlled as to pump the supernatant from the septic tank into said first reservoir, filter this supernatant via said filtering assembly, pump the sludge and the scum to said second reservoir and pump back the filtered supernatant to the septic tank to thereby reduce the portion of the content of the septic tank remaining in the recuperation system.

11. The system for the recuperation of septic tank content recited in claim 10, wherein said bidirectional pump assembly further
25 includes a fourth port connected to the bottom of said first reservoir.

12. The system for the recuperation of septic tank content recited in claim 10, wherein said filtering assembly includes a filter selected from the group consisting of bag filters, membrane filters, sand
5 filters, cartridge filters, centrifugal filters and clarifier filters.

13. The system for the recuperation of septic tank content recited in claim 12, wherein said filter is a membrane filter and includes a continuous biodegradable filtering medium; said recuperation system
10 further comprising a shredder used to shred used portions of said biodegradable filtering medium and to place the shredded medium in said second reservoir.

14. The system for the recuperation of septic tank content recited in claim 10, wherein one of said at least one pump suction pipe has a distal end provided with a nozzle head having lateral apertures.
15

15. The system for the recuperation of septic tank content recited in claim 14, wherein said nozzle head further includes a generally conical shaped end.
20

16. The system for the recuperation of septic tank content recited in claim 10, further comprising a controller electrically connected to said bidirectional pump assembly and to said filtering assembly; said
25 controller being configured to control the operation of these assemblies.

17. The system for the recuperation of septic tank content recited in claim 10, wherein said filtering assembly includes pre-filter.

18. A system for the recuperation of septic tank content including sludge, supernatant and scum, said system comprising:

a first reservoir;

a first pump having an inlet and an outlet open to said first reservoir;

a first pump suction pipe having a proximate end connected to said inlet of said first pump;

a filtering assembly associated with said first pump suction pipe;

a second reservoir;

a second pump having an inlet and an outlet open to said second reservoir;

a second pump suction pipe having a proximate end connected to said inlet of said second pump;

whereby, a) said first pump may be so controlled as to pump the supernatant from the septic tank to said first reservoir, b) said filtering assembly may be so controlled to filter the pumped supernatant, c) said second pump may be so controlled as to pump the sludge and the scum to said second reservoir, and d) said first pump may be so controlled as to pump back the filtered supernatant to the septic tank to thereby reduce the portion of the content of the septic tank remaining in the recuperation system.

19. The system for the recuperation of septic tank content recited in claim 18, further comprising a controller electrically connected to said first and second pumps and to said filtering assembly; said
5 controller being configured to control the operation thereof.

20. The system for the recuperation of septic tank content recited in claim 19, further comprising a sensor associated with said first pump suction pipe and connected to said controller to supply
10 information about the turbidity of the pumped supernatant.

21. The system for the recuperation of septic tank content recited in claim 20, further comprising a bypass assembly controlled by said controller, said bypass assembly being so associated to said first
15 pump suction pipe as to divert the flow thereof from said first reservoir to said second reservoir upon detection of a turbidity level above a predetermined level.

22. The system for the recuperation of septic tank content recited in claim 18, wherein said filtering assembly includes a filter selected from the group consisting of bag filters, membrane filters, sand
20 filters, cartridge filters, centrifugal filters and clarifier filter.

23. The system for the recuperation of septic tank content recited in claim 22, wherein said filtering assembly further includes a pre-filter.

5 24. The system for the recuperation of septic tank content recited in claim 18, wherein said first pump suction pipe has a distal end provided with a nozzle head having lateral apertures.

25. The system for the recuperation of septic tank content recited in claim 24, wherein said nozzle head further includes a generally conical shaped end.

10 26. The system for the recuperation of septic tank content as recited in claim 24, wherein said nozzle head further includes a floating element configured and sized to keep said lateral apertures below the level of the scum.

15 27. A system for the recuperation of septic tank content including sludge, supernatant and scum, said system comprising:

a first reservoir;

a first pump suction pipe having a proximate end connected to said first reservoir;

a second reservoir;

20 a second pump suction pipe having a proximate end connected to said second reservoir;

a vacuum pump connected to said first and second reservoirs.

a filtering assembly associated with said first reservoir;

whereby, a) said vacuum pump may be so controlled as to generate a partial vacuum in said first reservoir to pump the supernatant from the septic tank to said first reservoir, b) said filtering assembly may be so controlled to filter the pumped supernatant, c) said vacuum pump
5 may be so controlled as to generate a partial vacuum in said second reservoir to pump the sludge and the scum to said second reservoir, and d) said filtered supernatant may be returned to the septic tank via said first pump suction pipe to thereby reduce the portion of the content of the septic tank remaining in the recuperation system.

10 28. A system for the recuperation of septic tank content including sludge, supernatant and scum, said system comprising:


a first reservoir;

a second reservoir;

means for pumping said supernatant into said first
15 reservoir and said sludge and scum into said first reservoir; said pumping means being configured to allow said pumping back of said supernatant into said septic tank;


means for filtering the supernatant;

whereby, said system is so controlled as to pump the supernatant from
20 the septic tank into said first reservoir via said pumping means, filter this supernatant via said filtering means, pump the sludge and the scum to said second reservoir and pump back the filtered supernatant to the septic tank via said pumping means to thereby reduce the portion of the content of the septic tank remaining in the recuperation system.

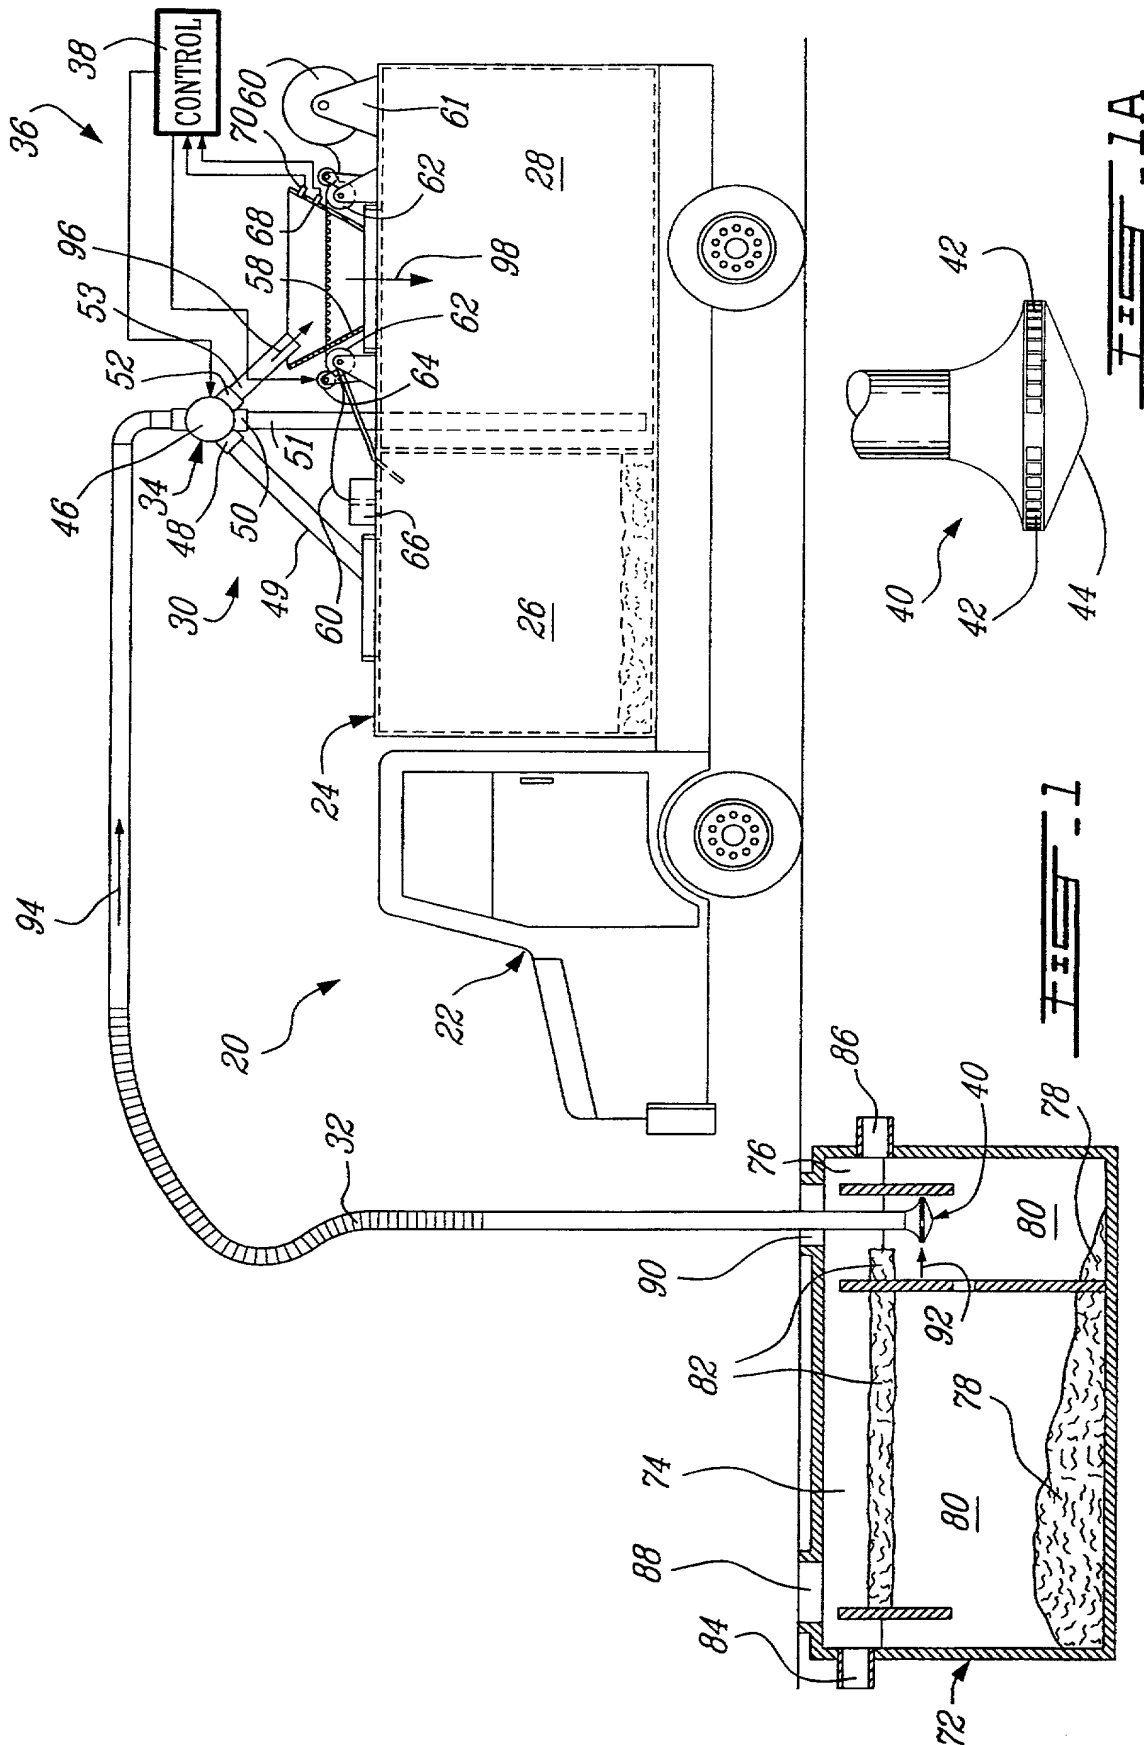


2/19

FIG. 2

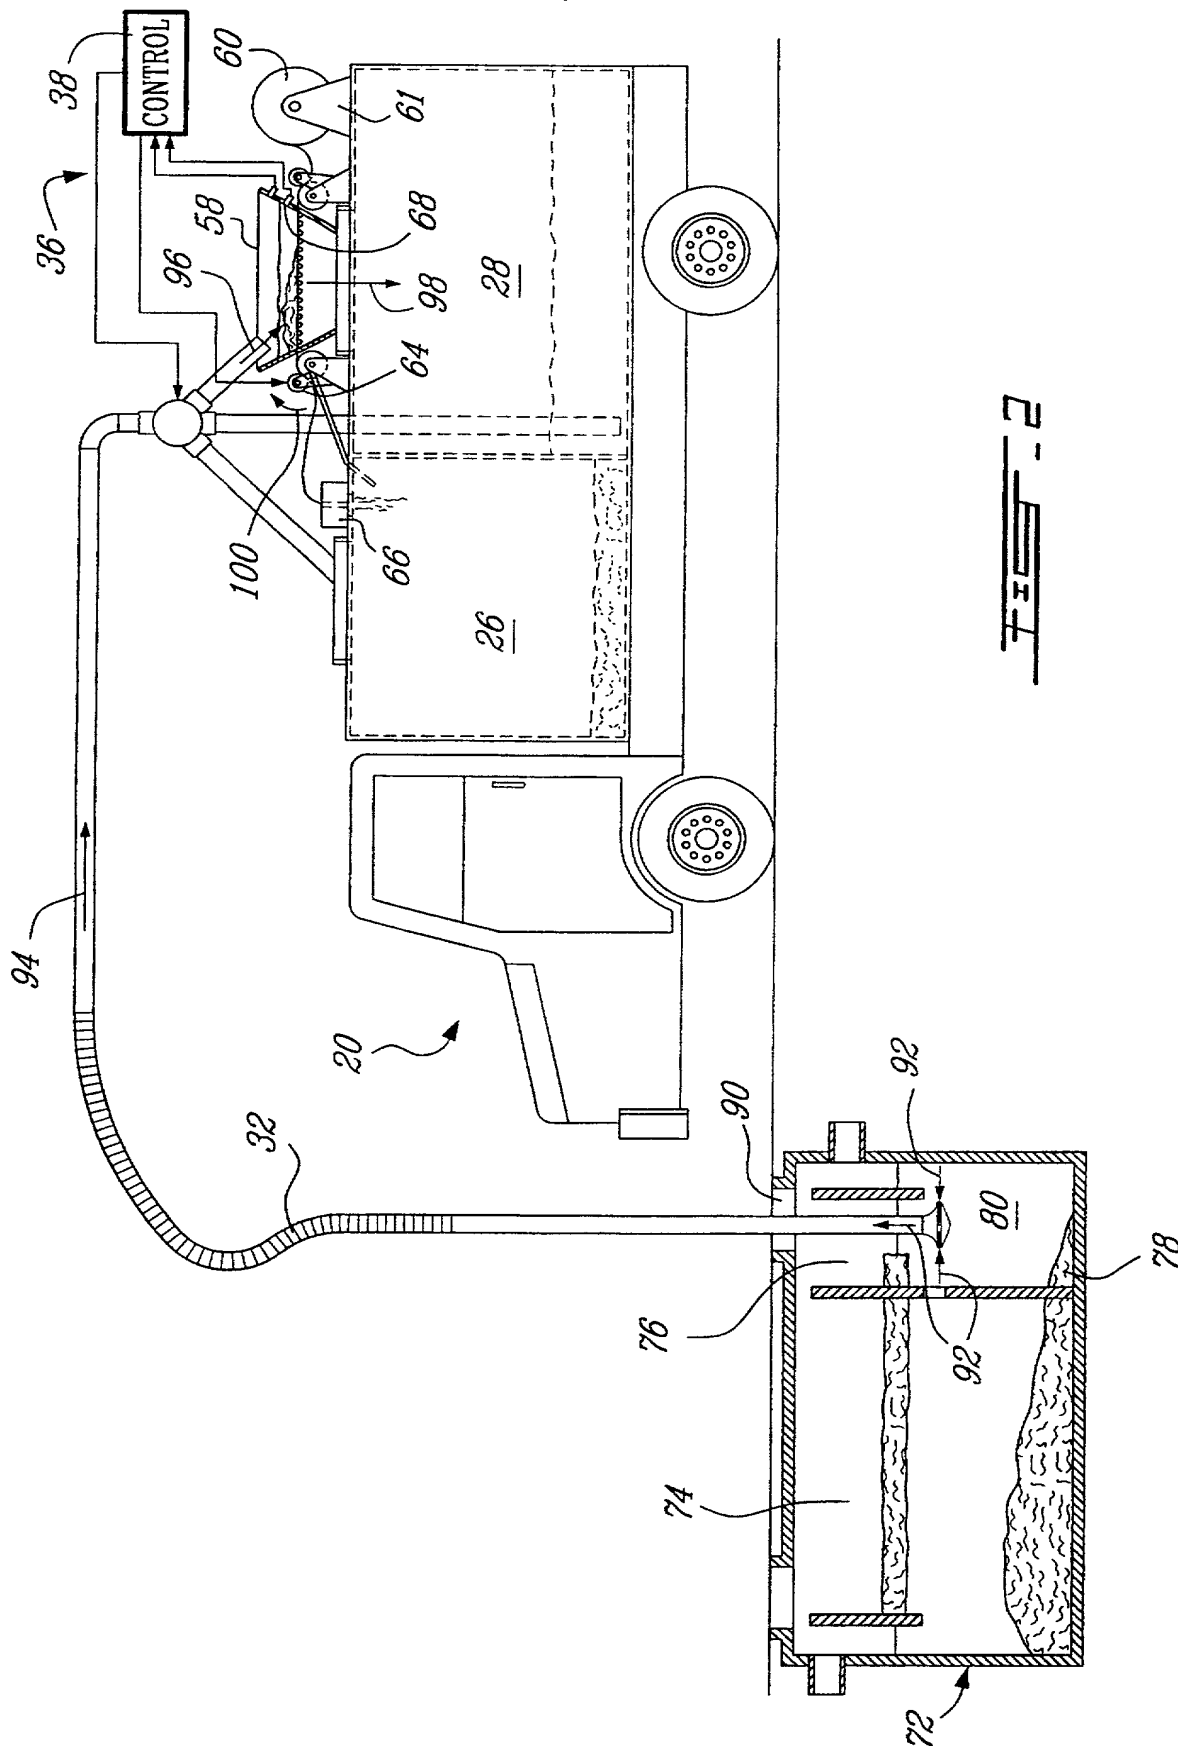

3/19

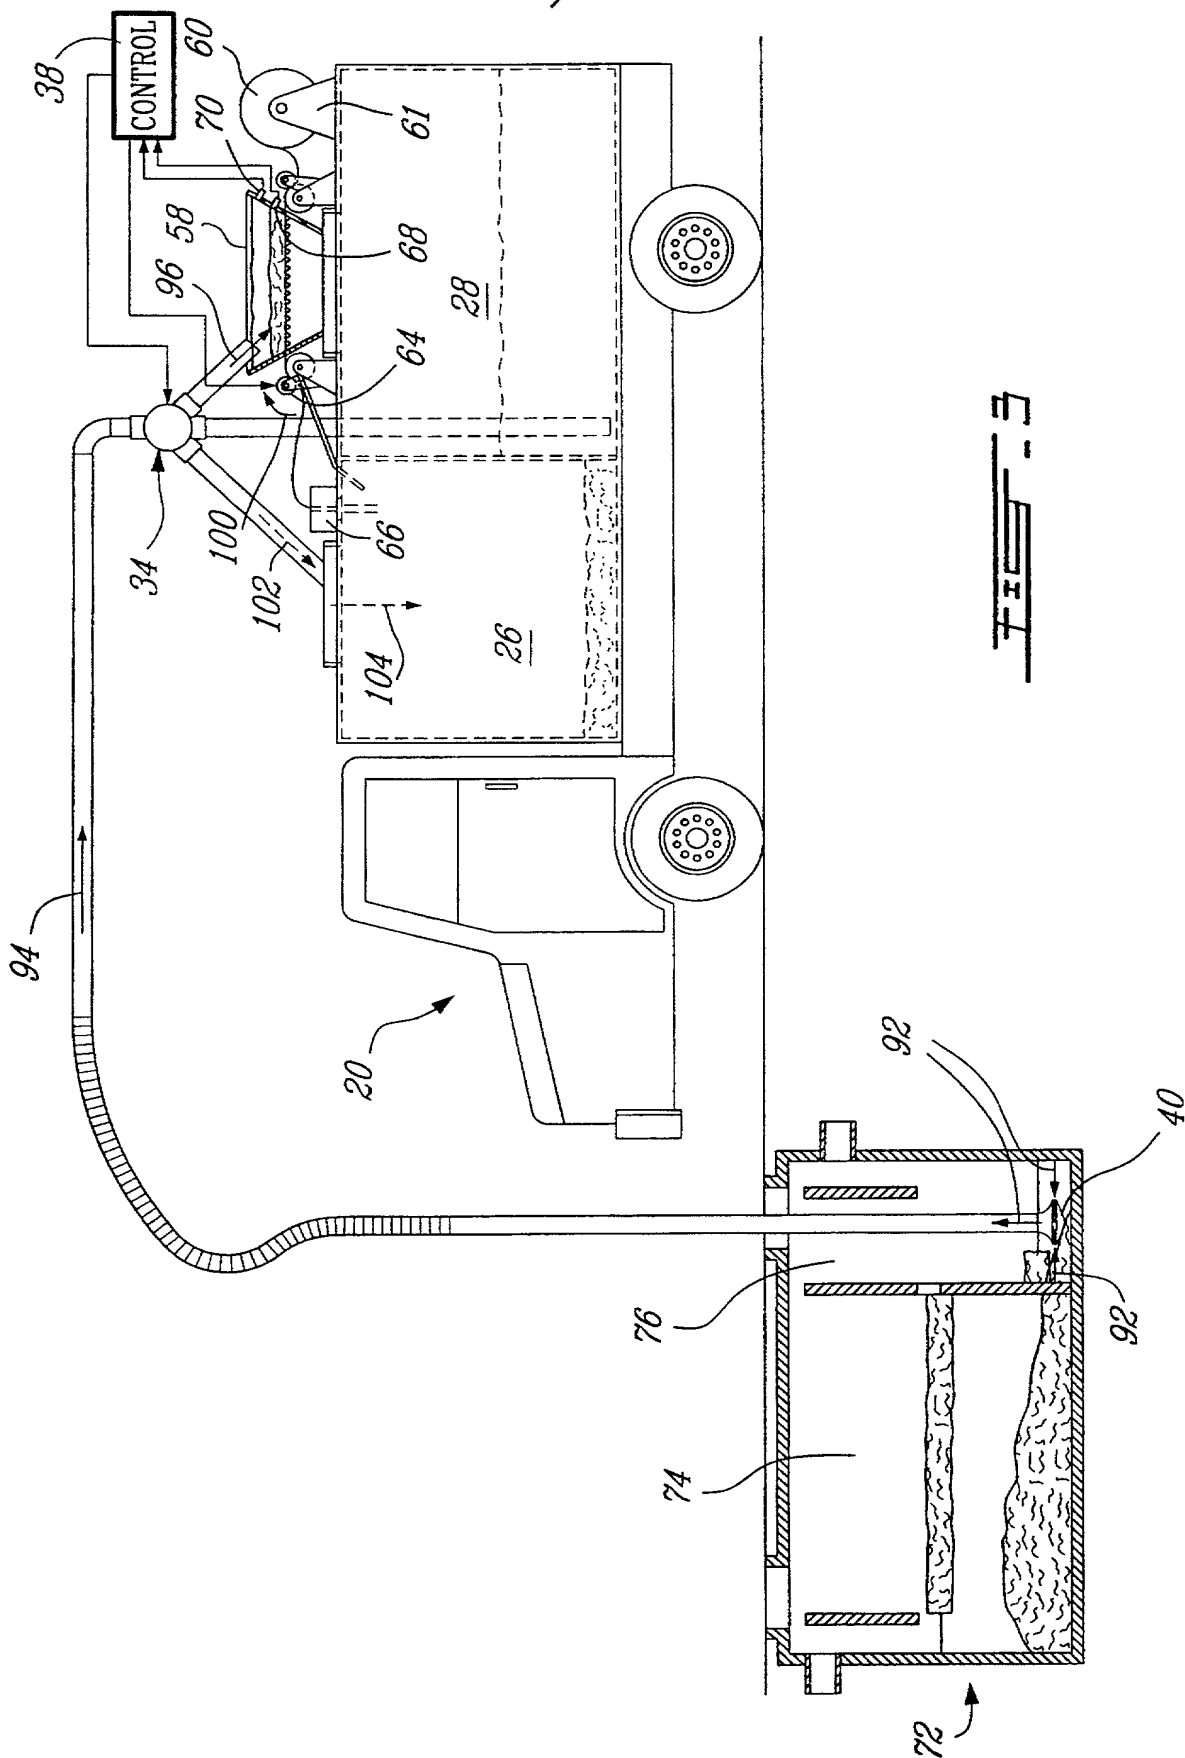

4/19

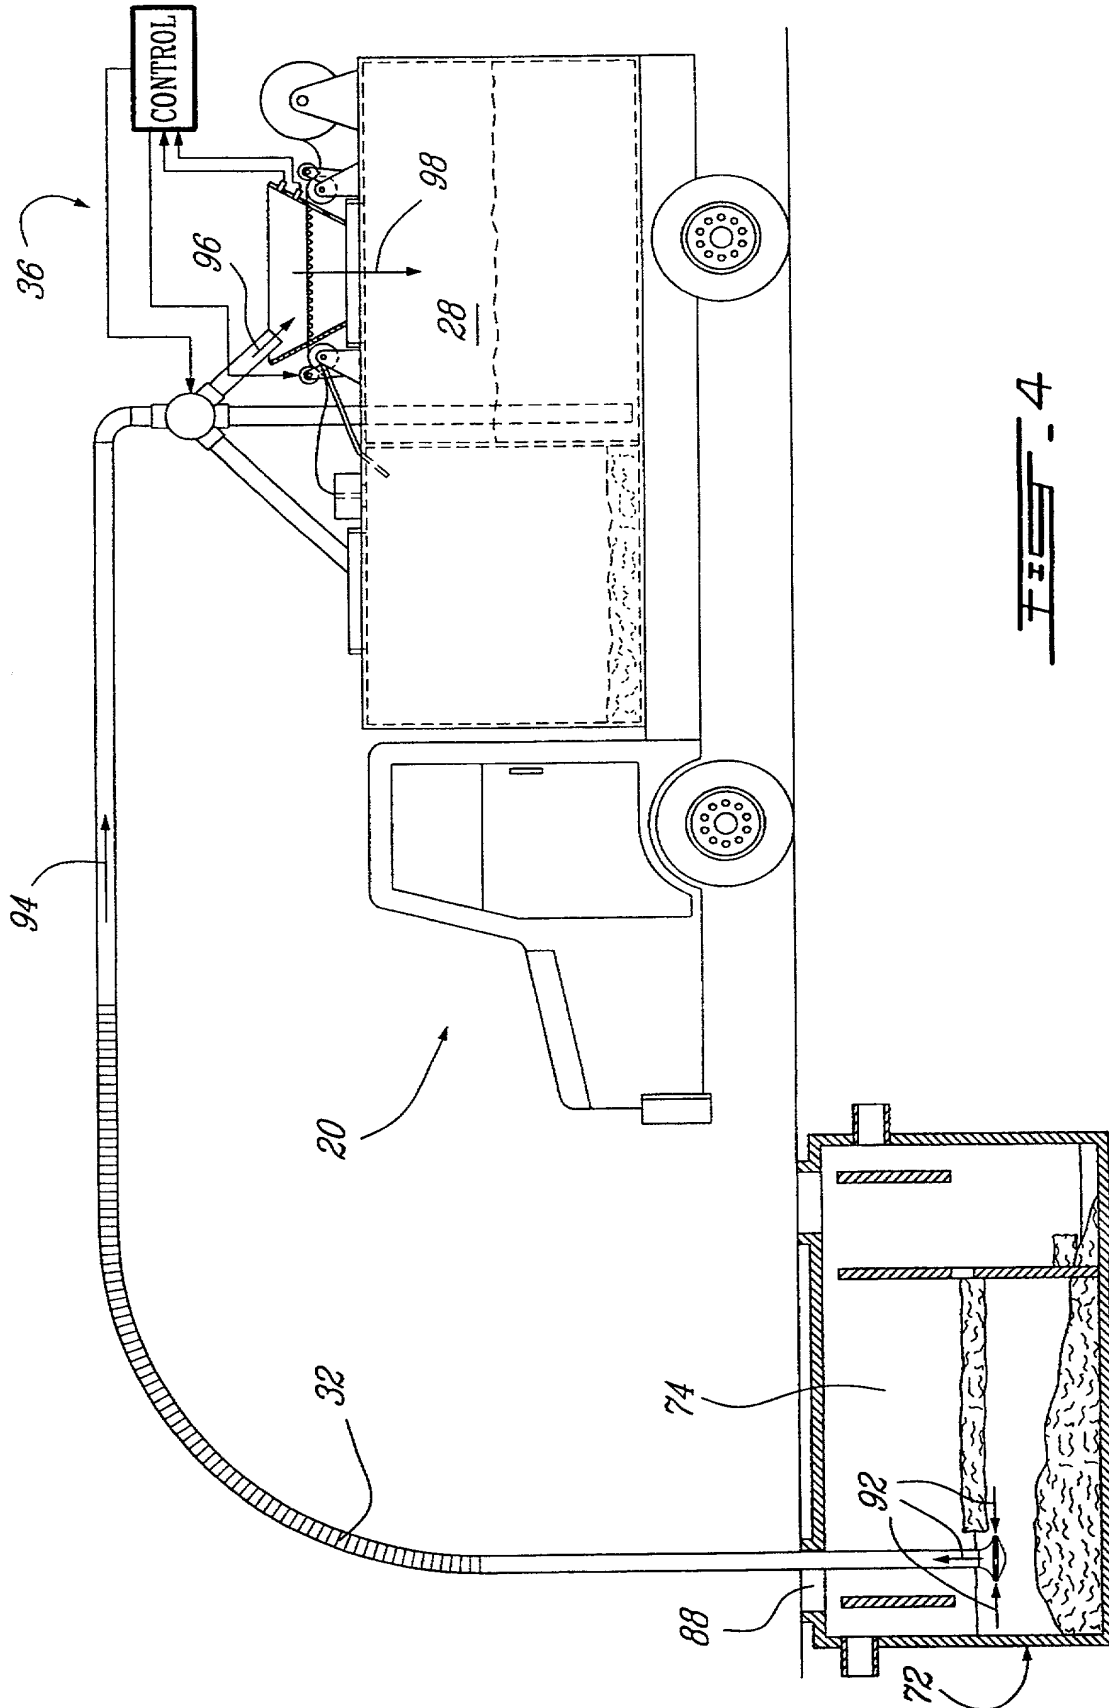


FIG. 4

FIG. 4

5/19


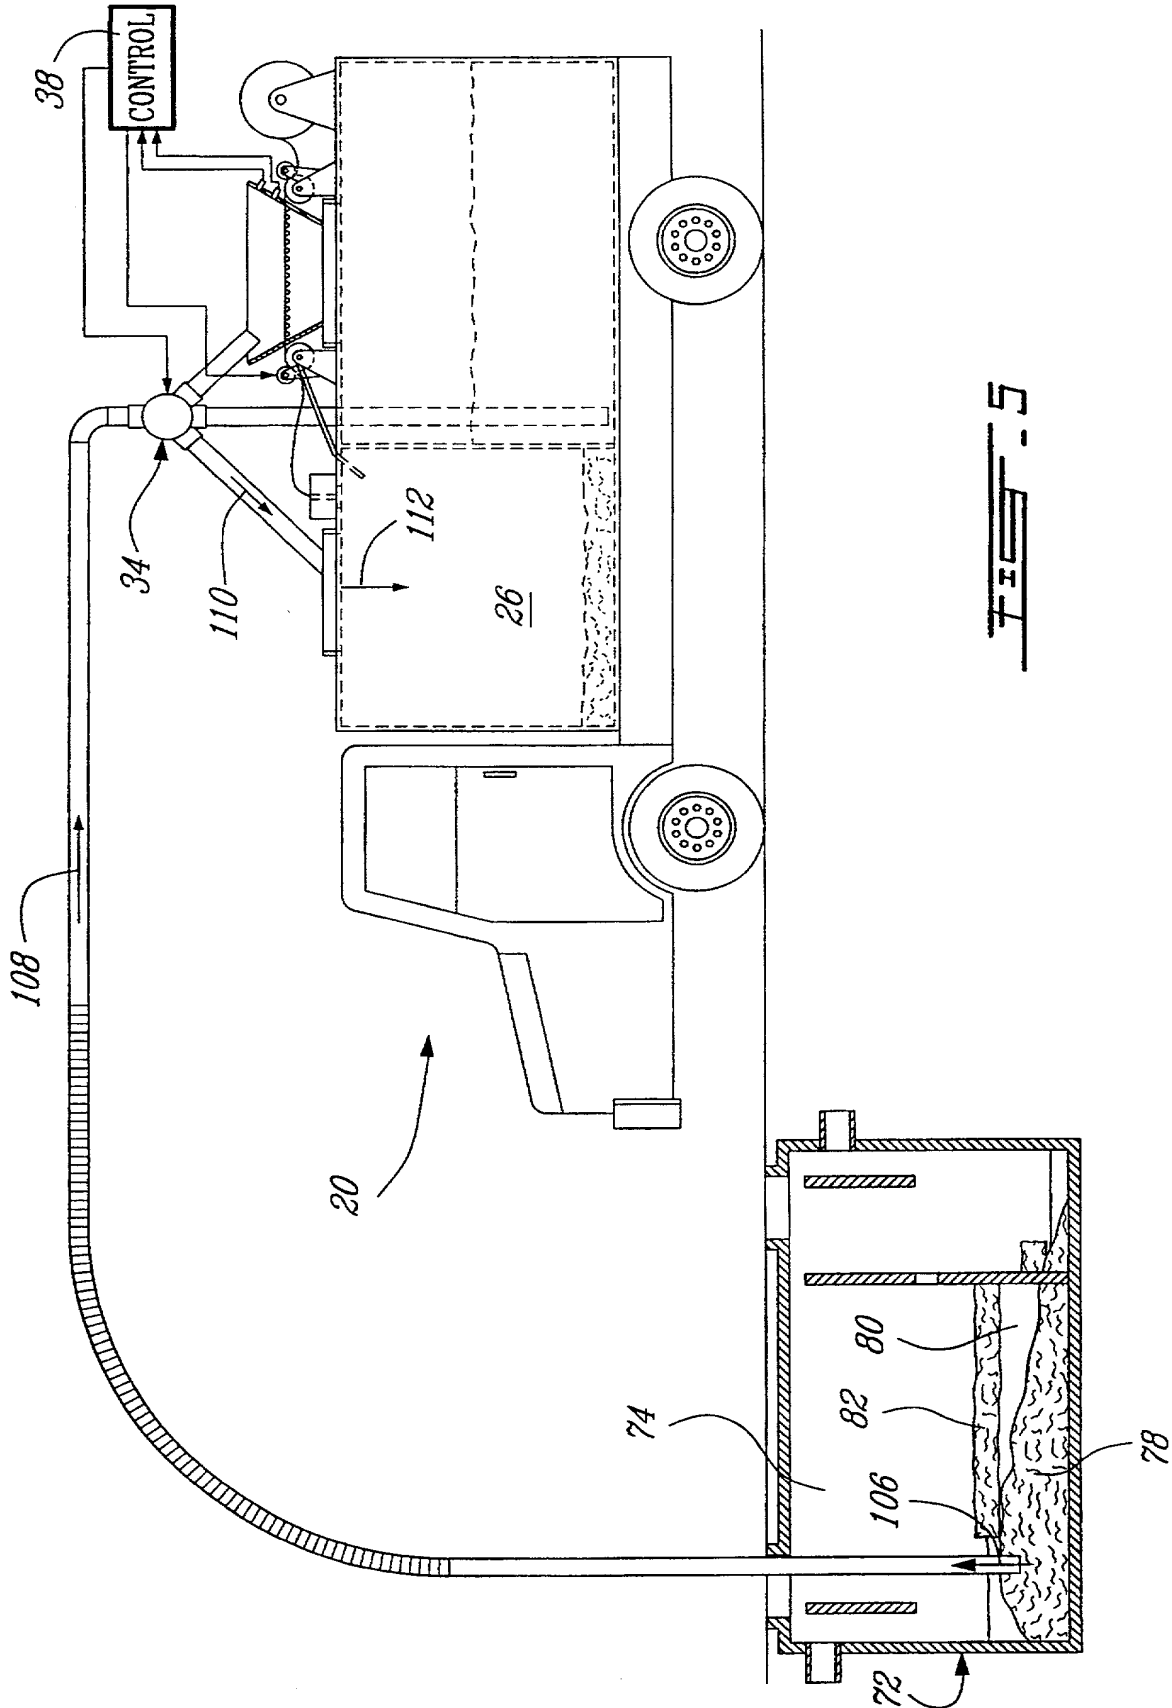


FIG. 5

6/19

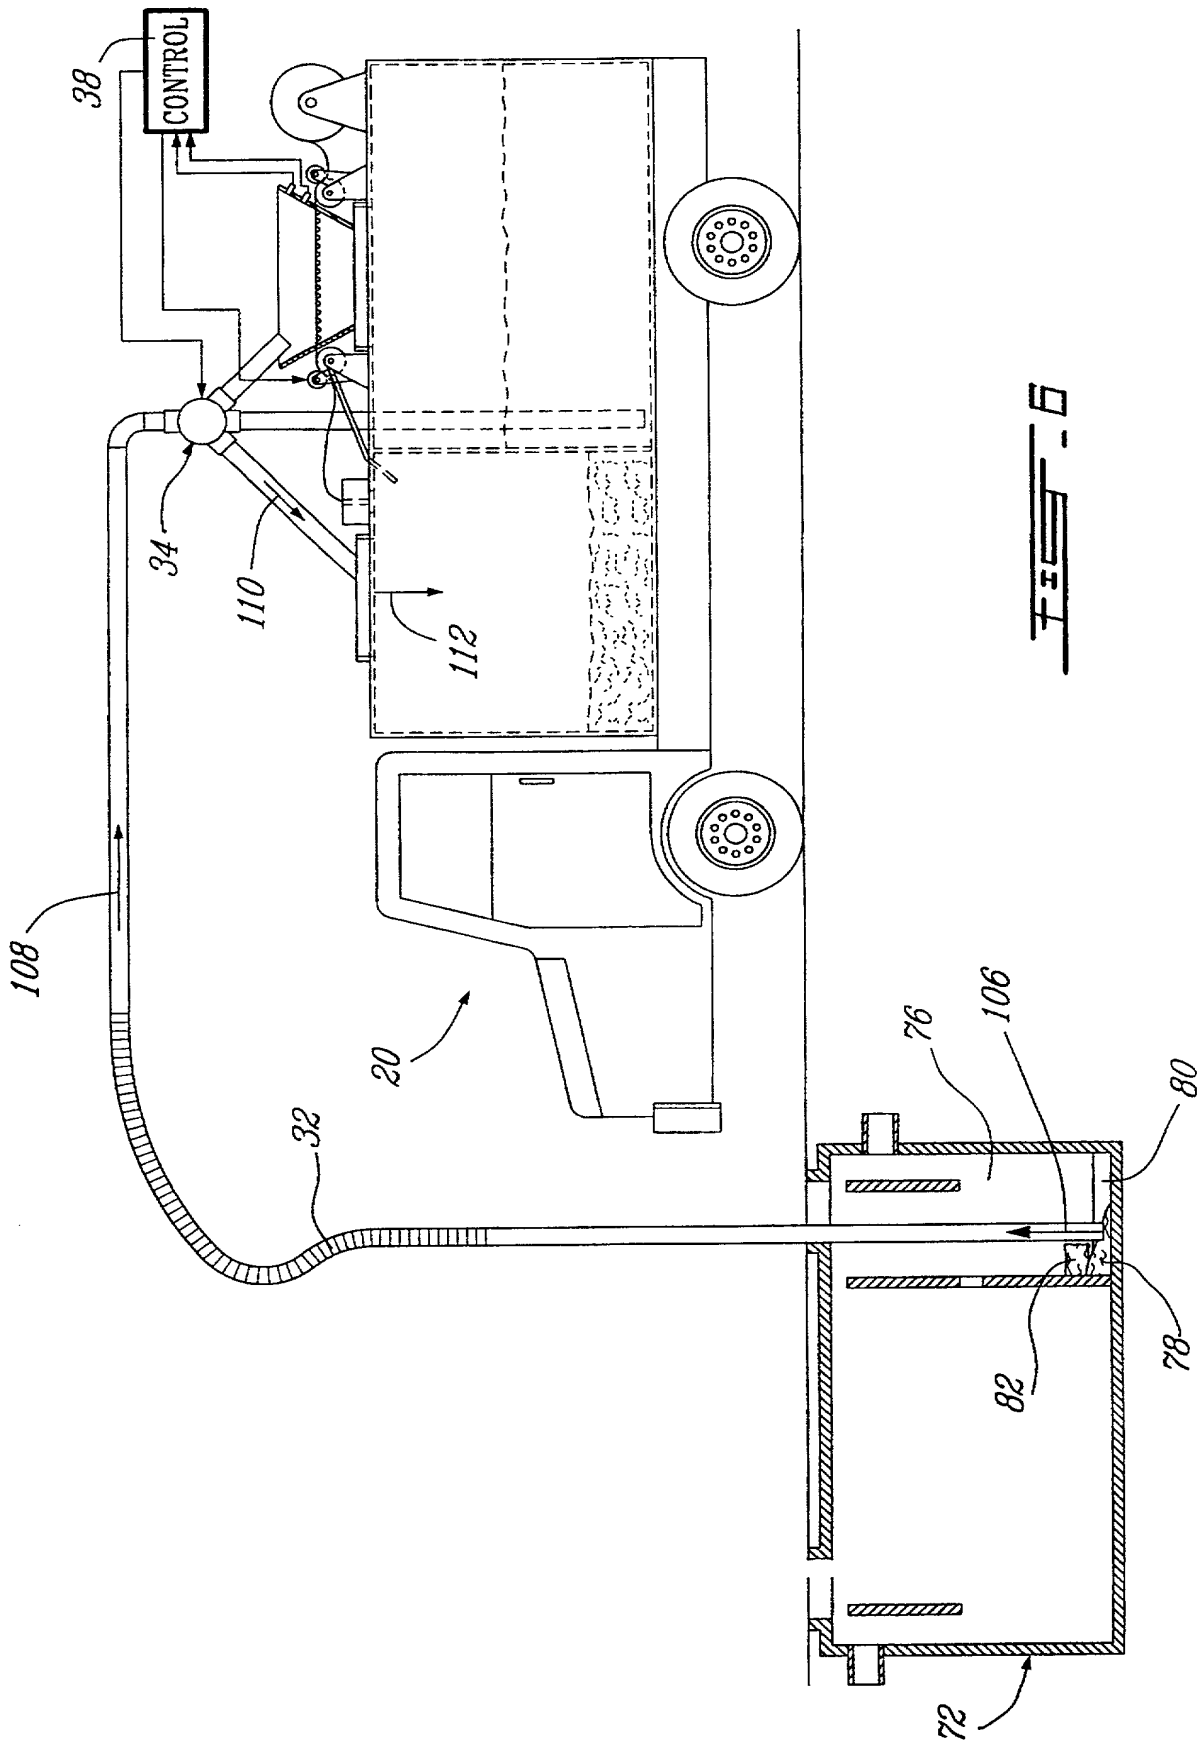

7/19

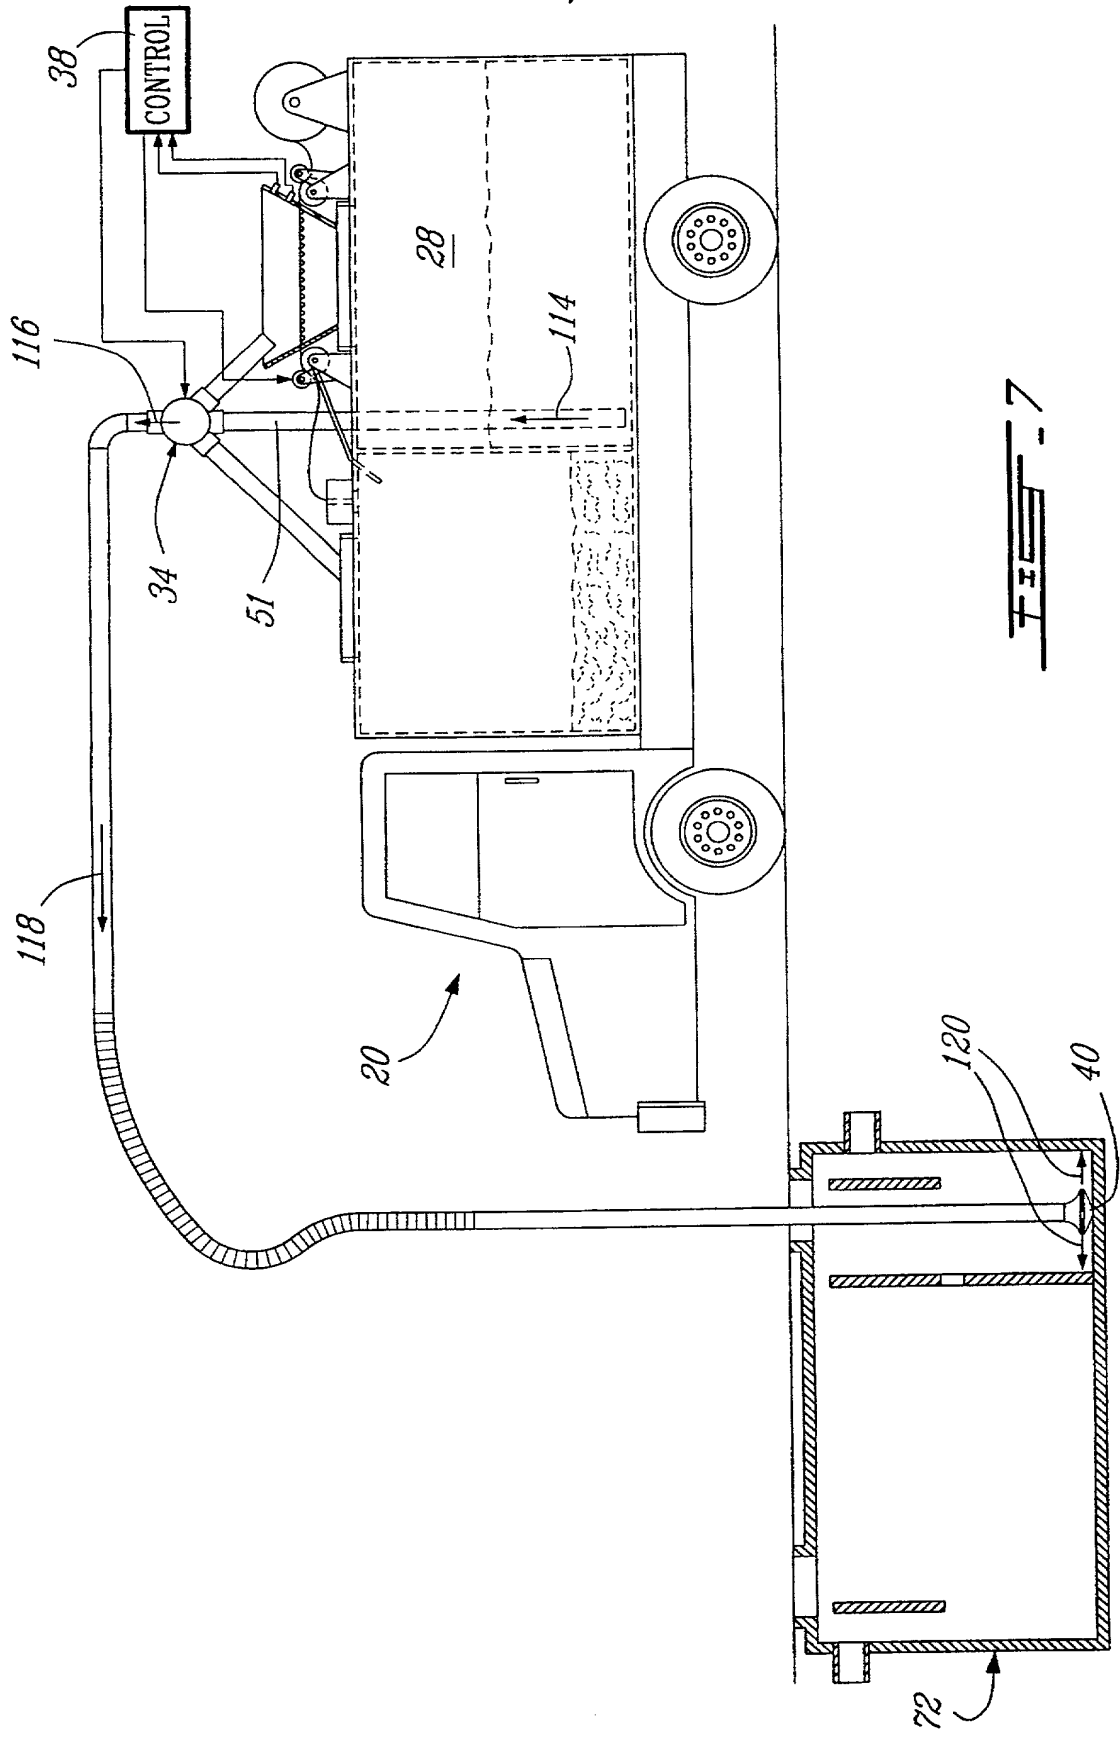


FIG. 7

2049365 "Sheet 7 of 7"

8/19



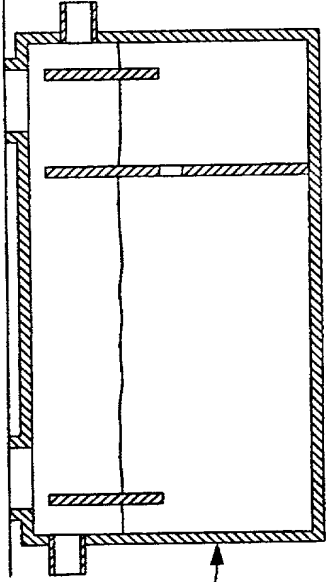


FIG. 8

9/19

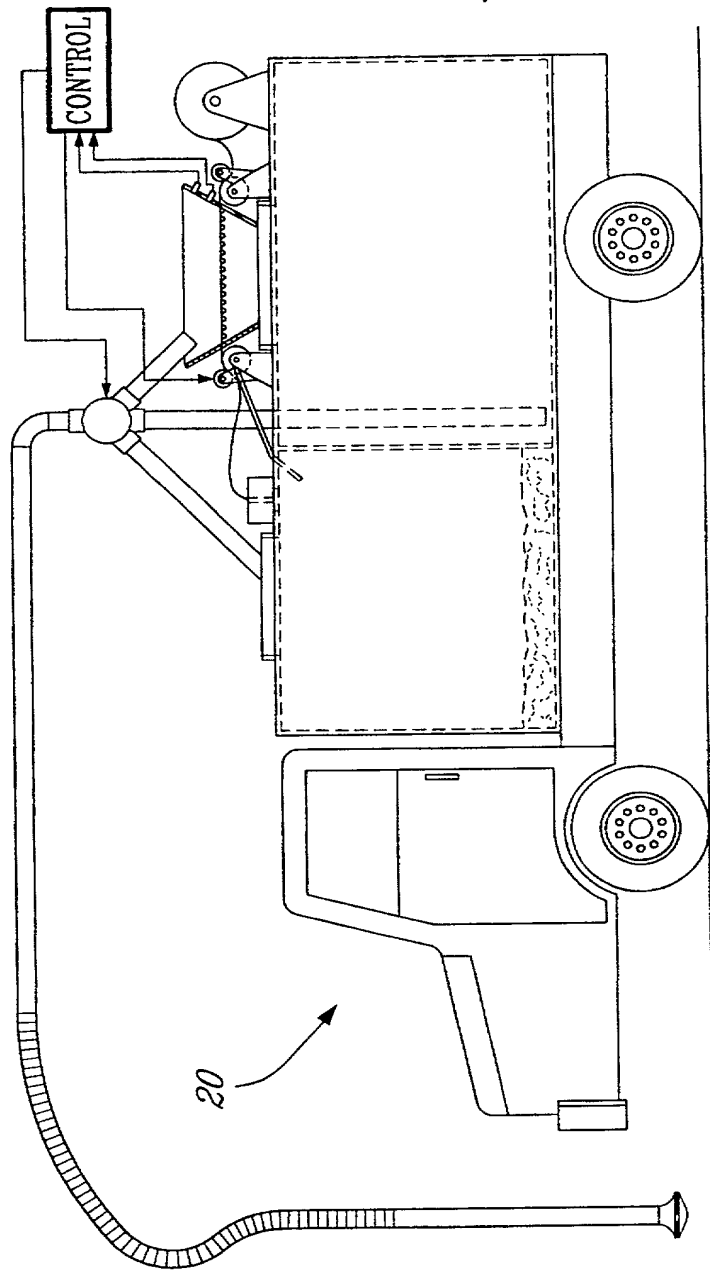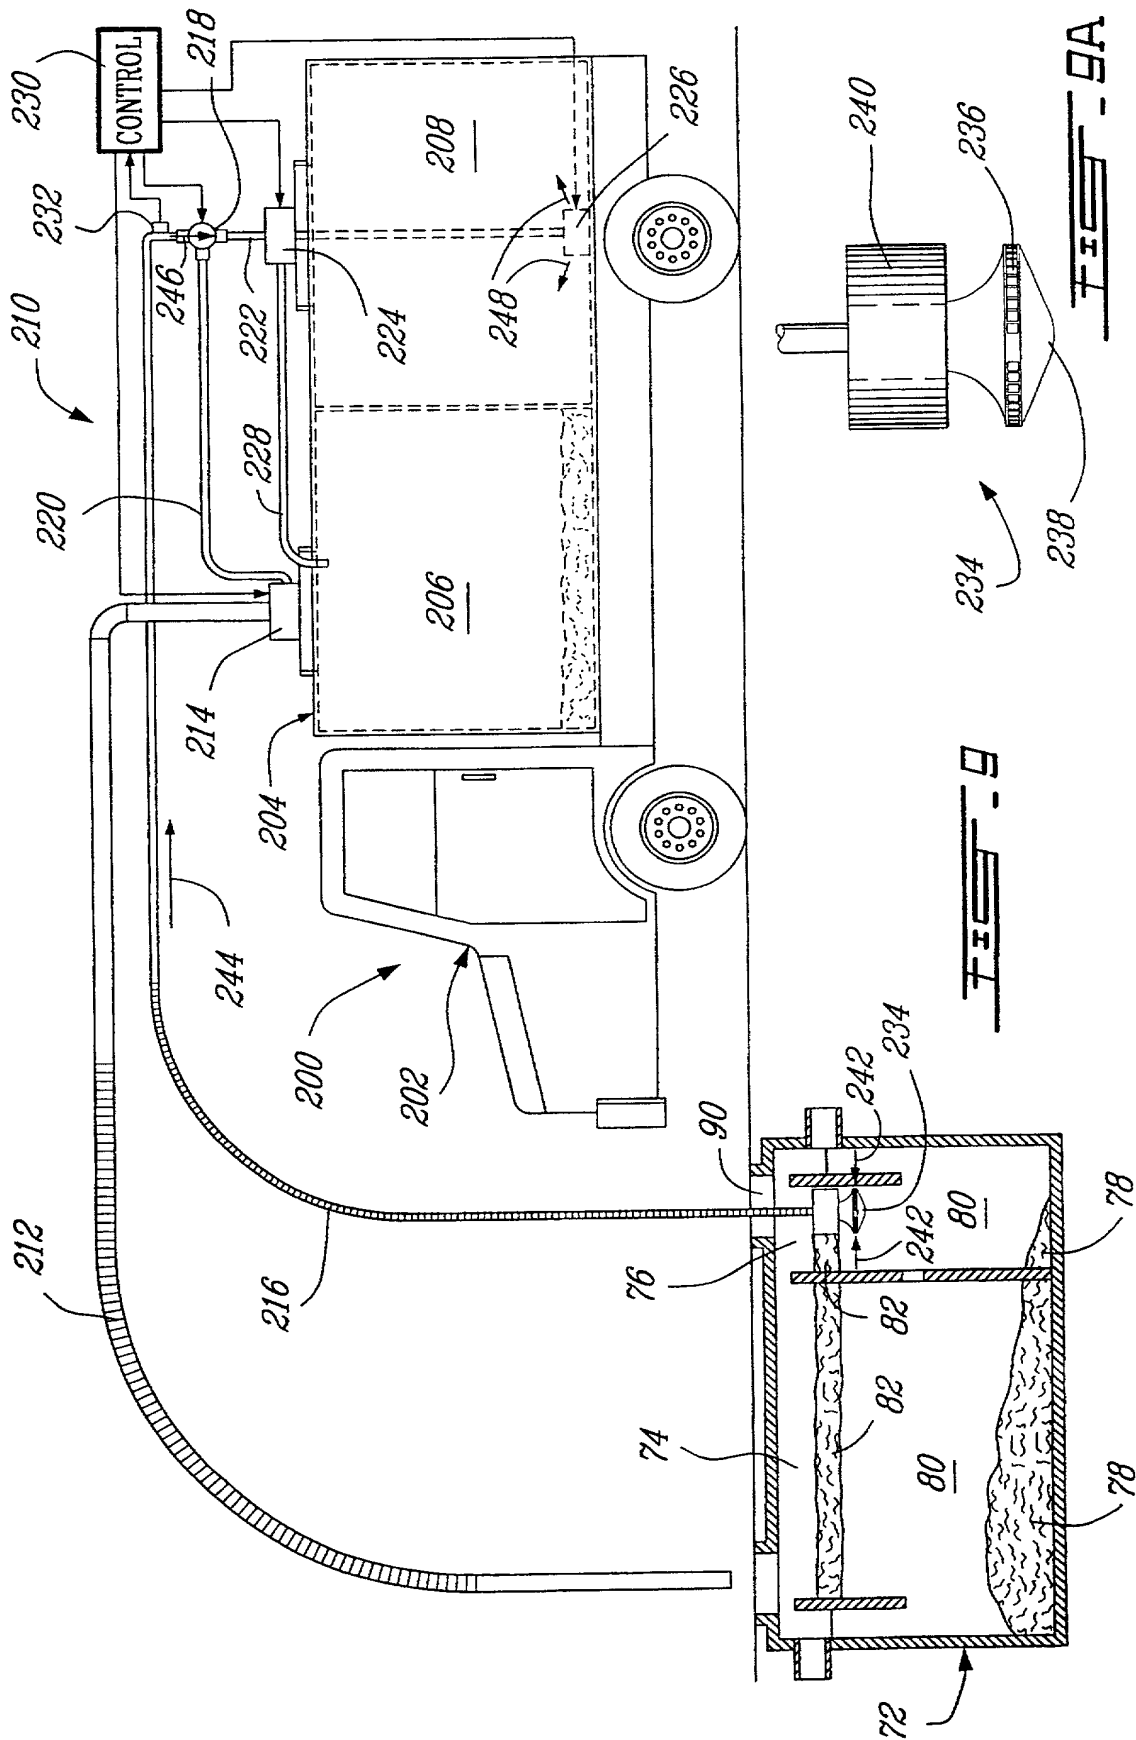

10/19

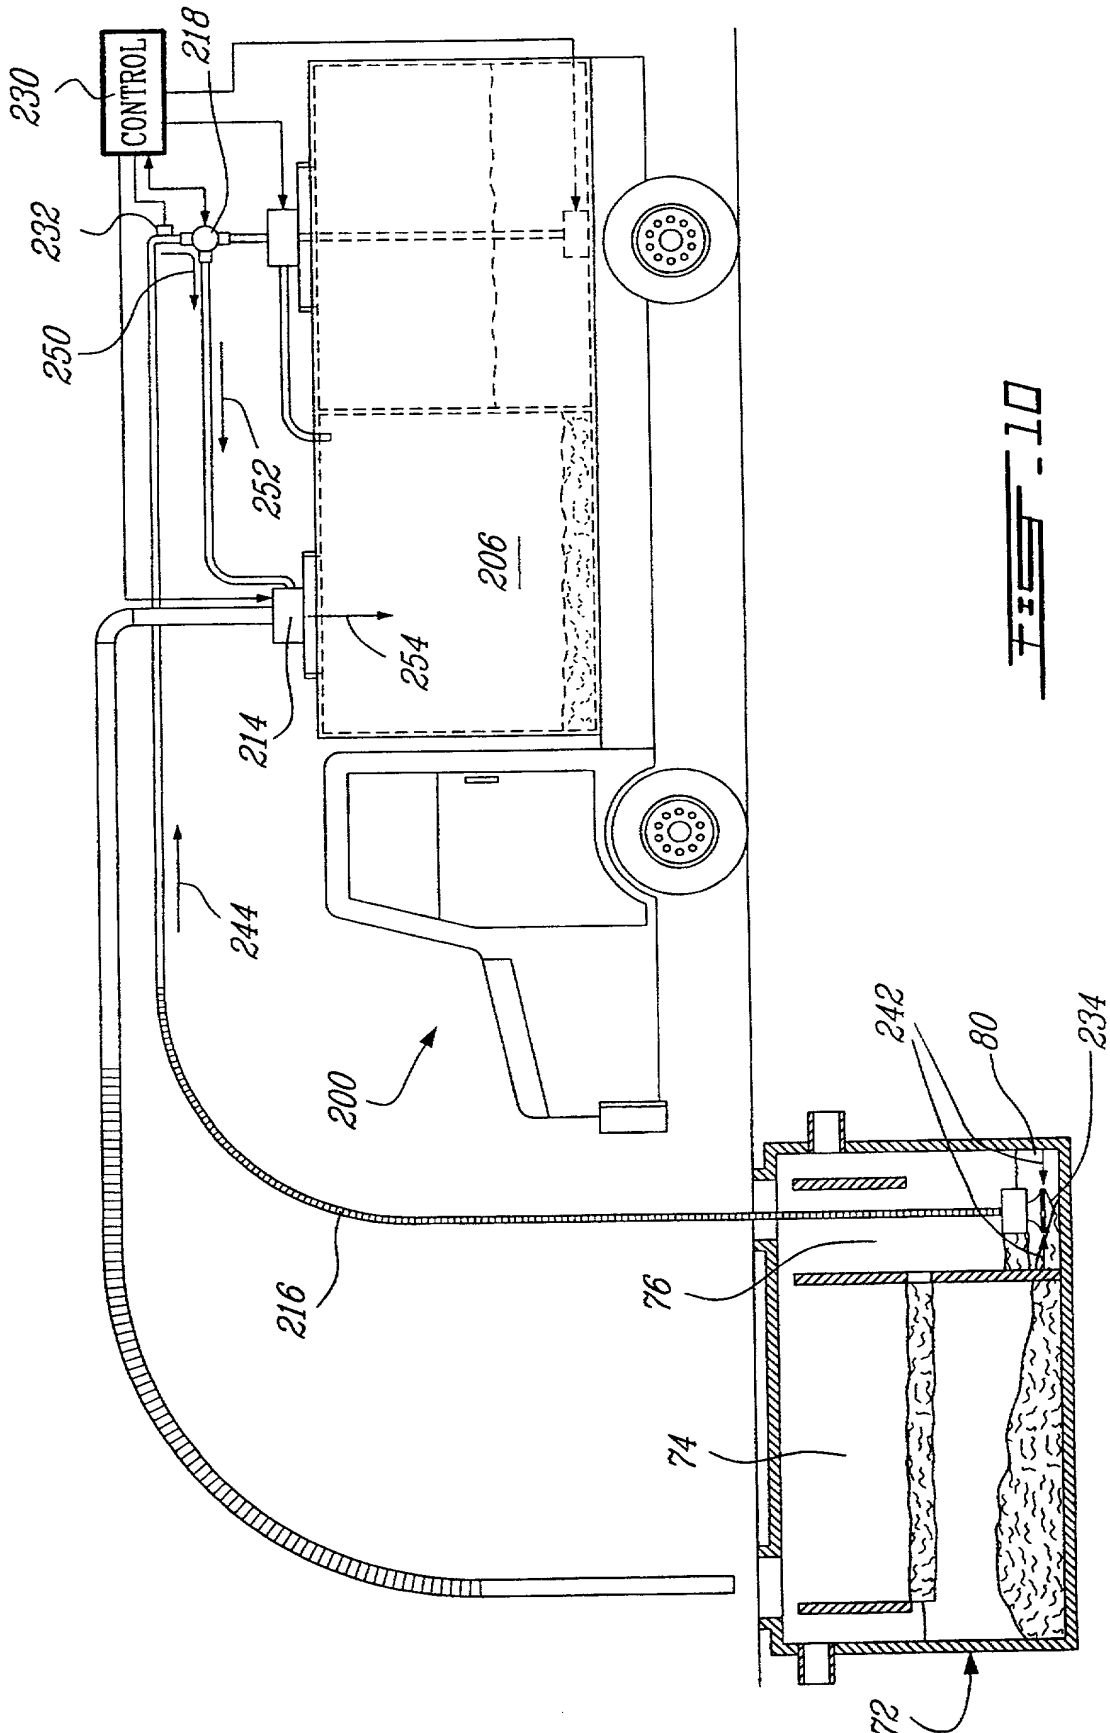


FIG. 10

11/19

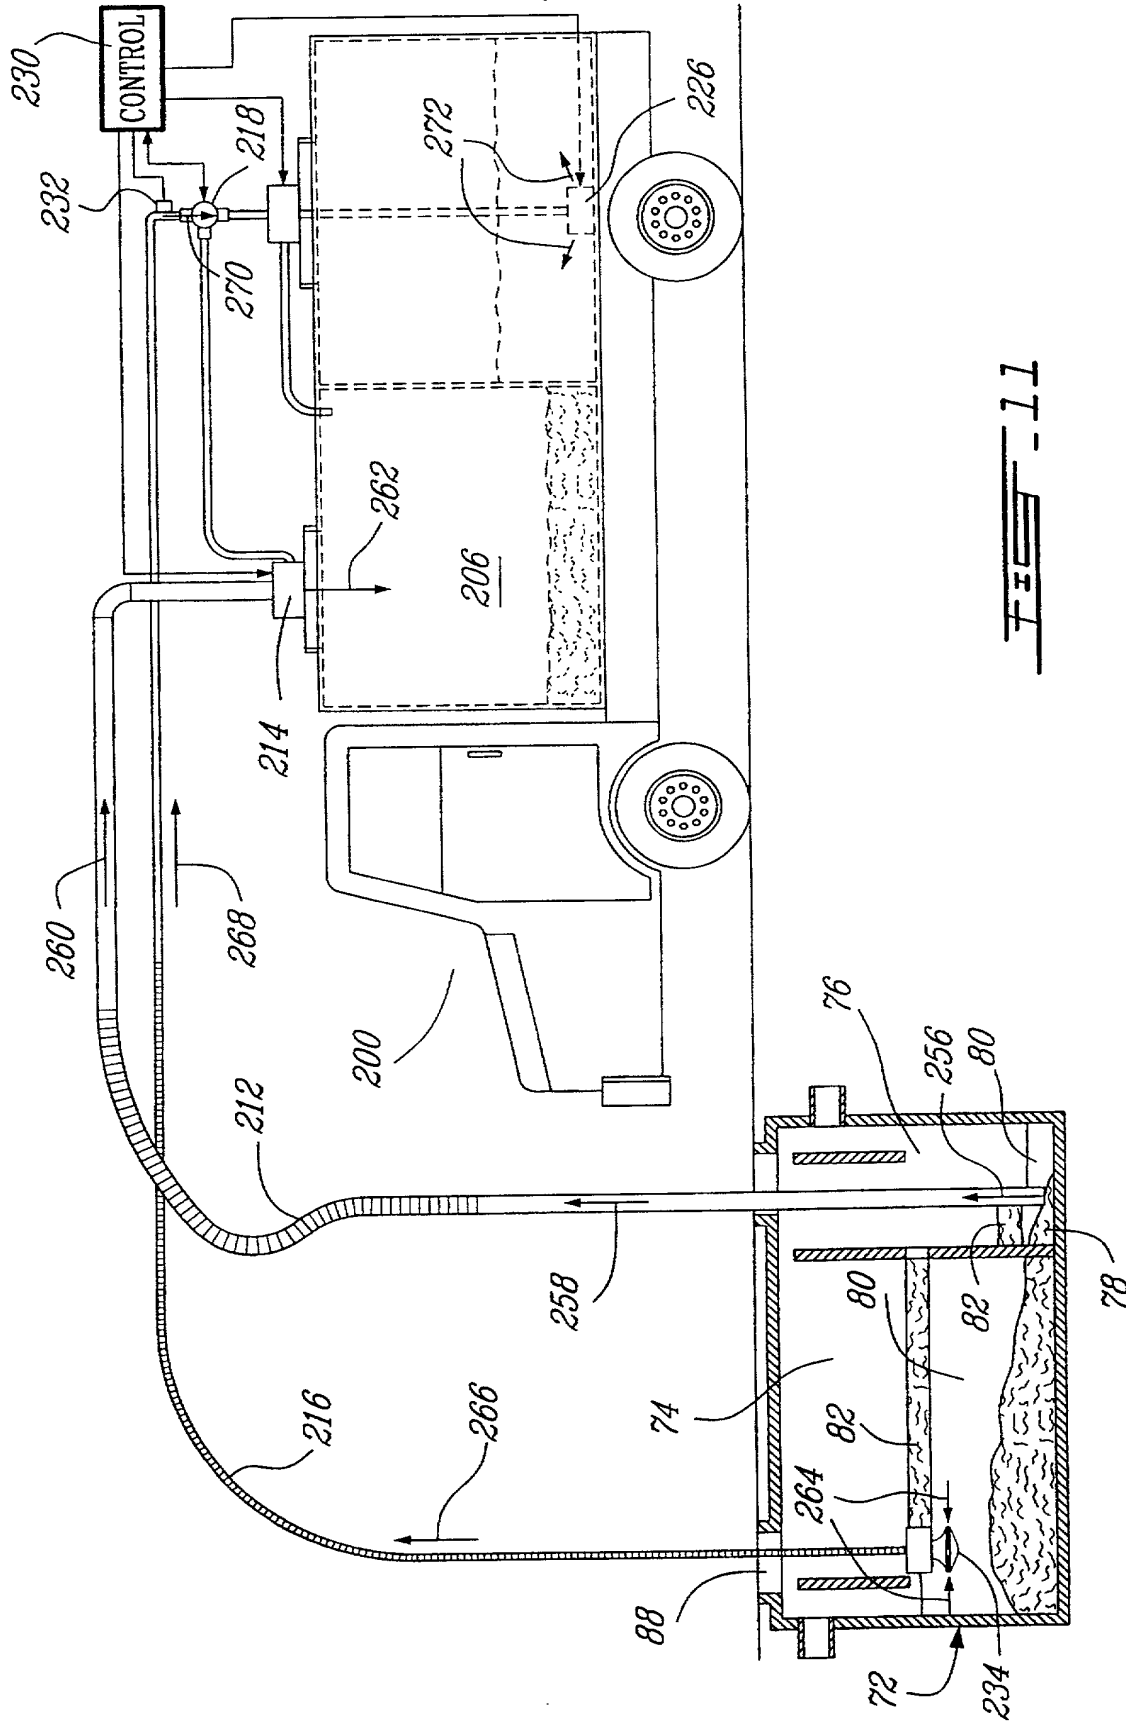


FIG. 11

FIG. 11

12/19

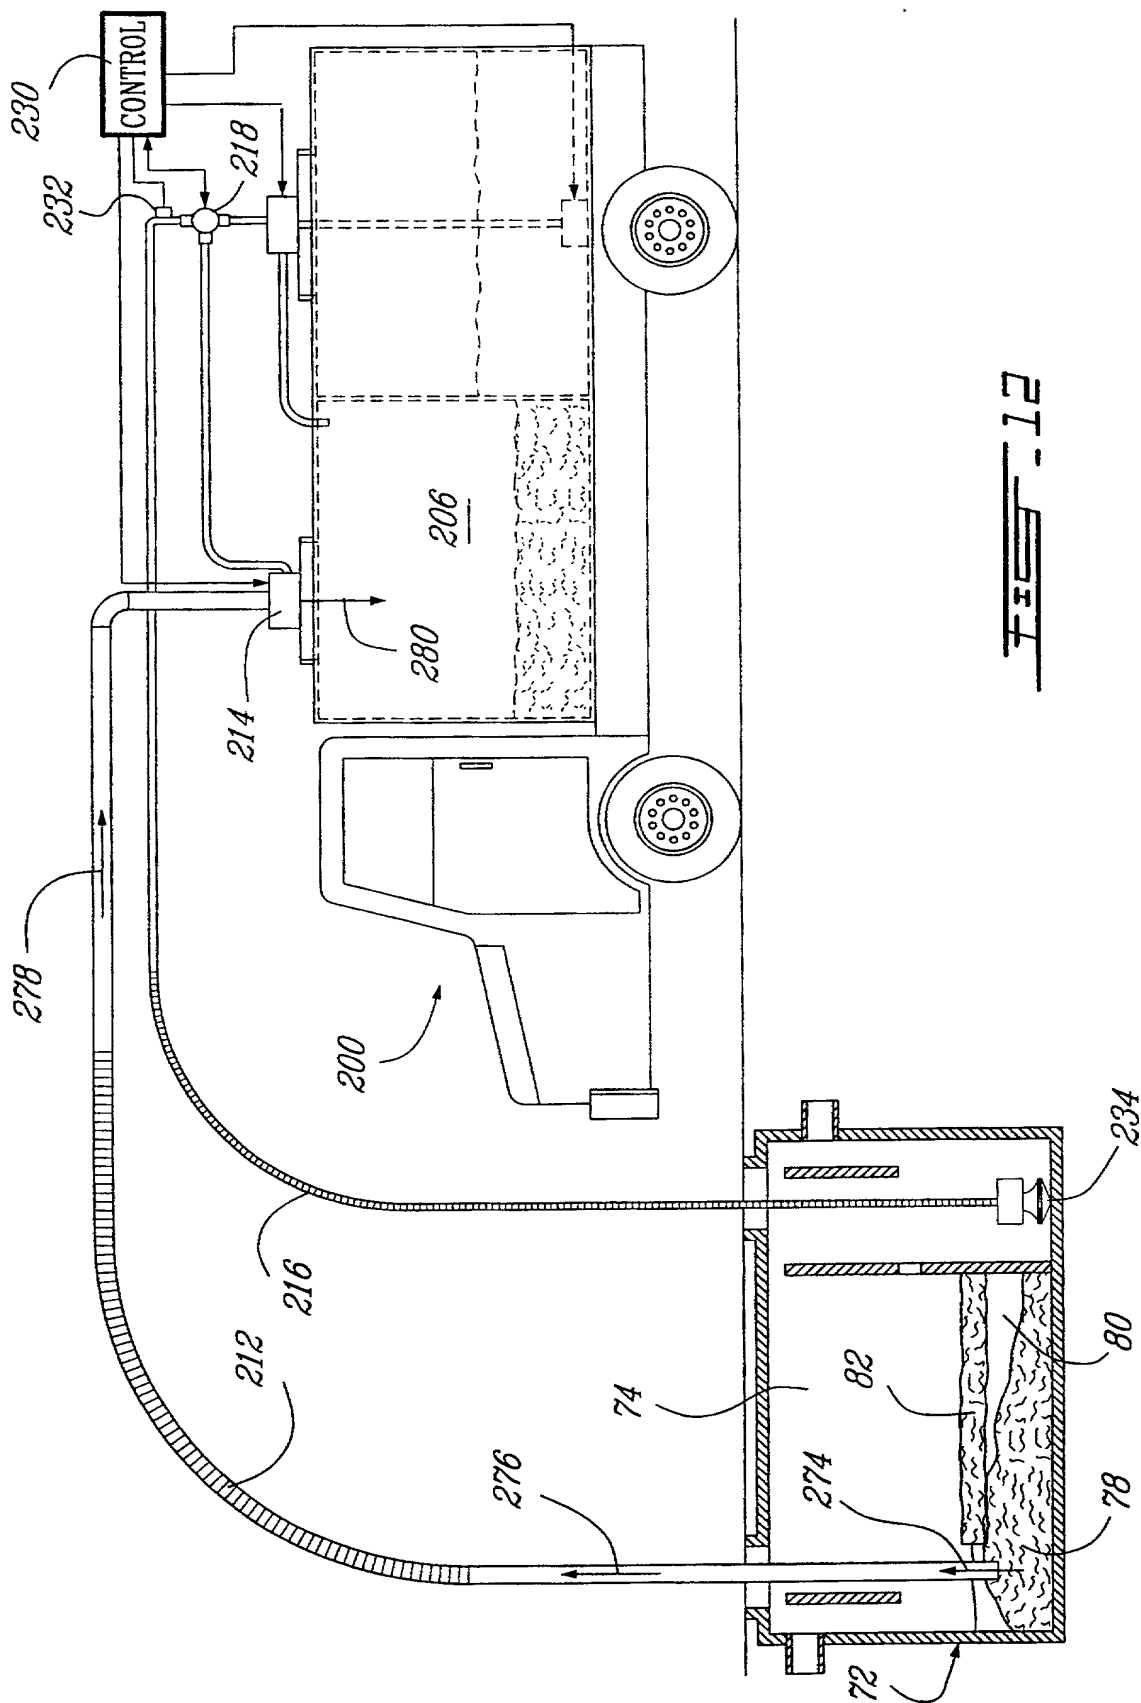


FIG. 12

13/19

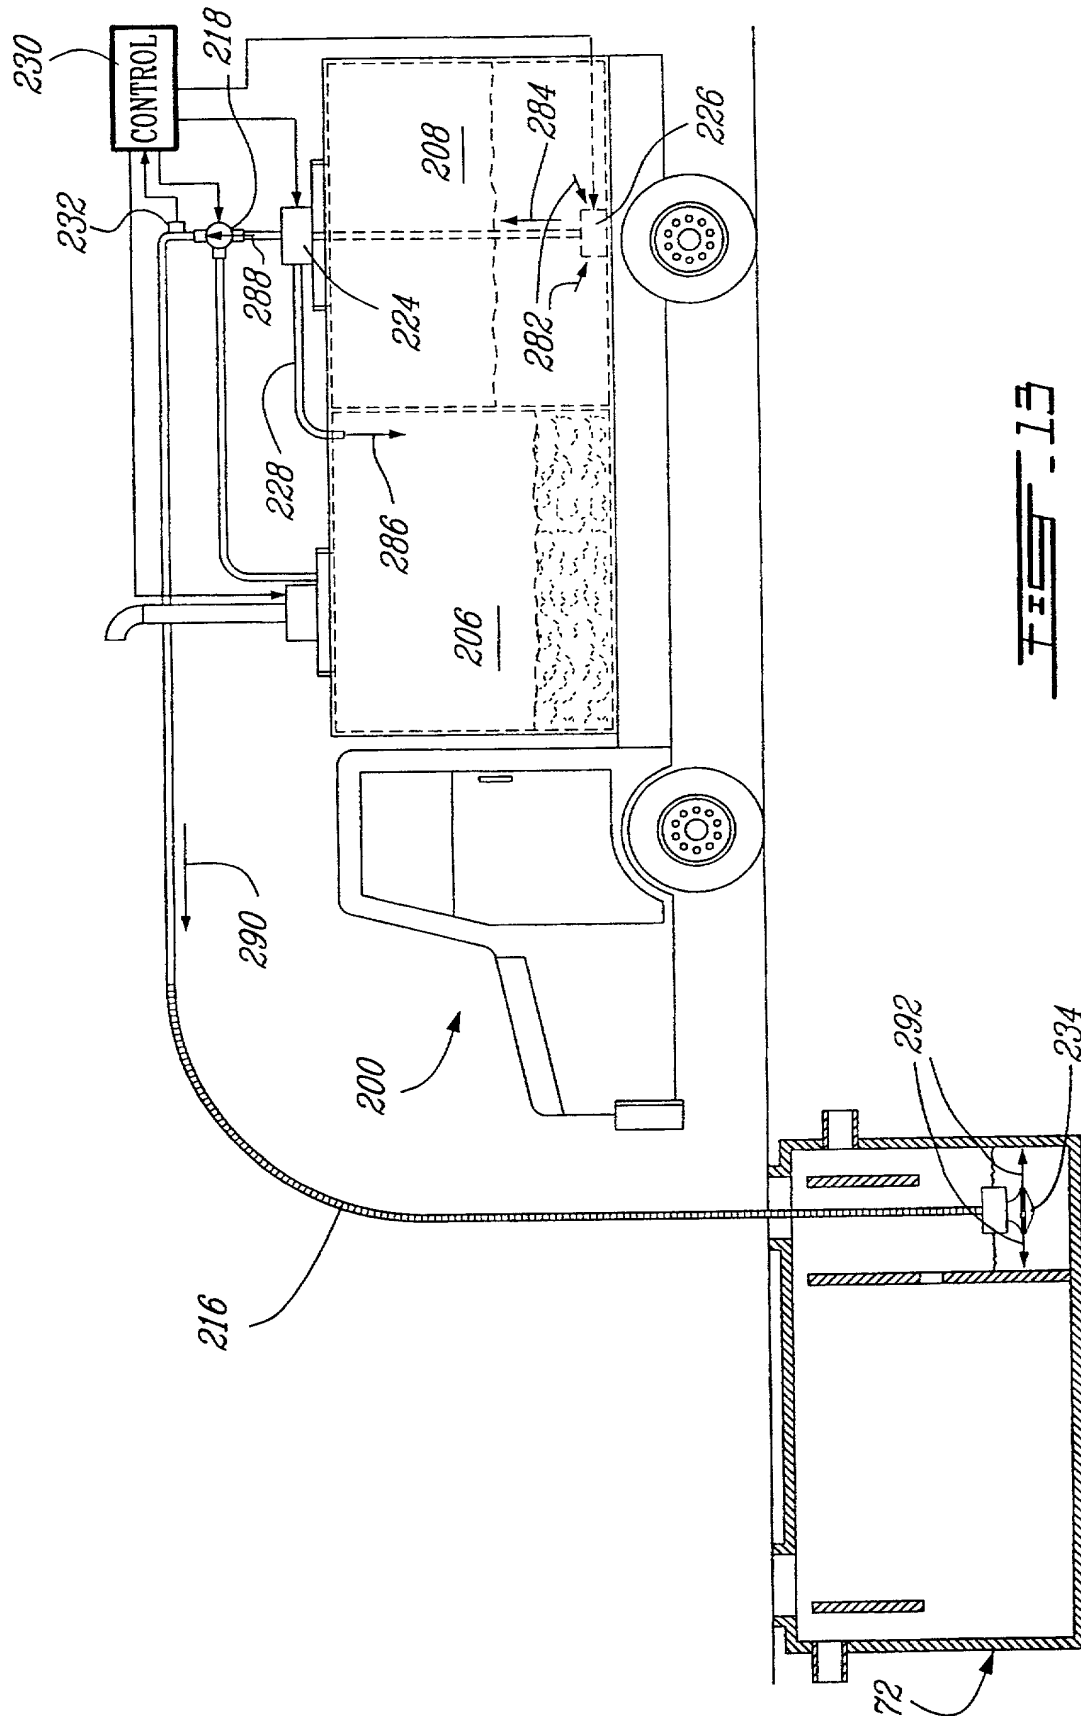


FIG. 13

14/19


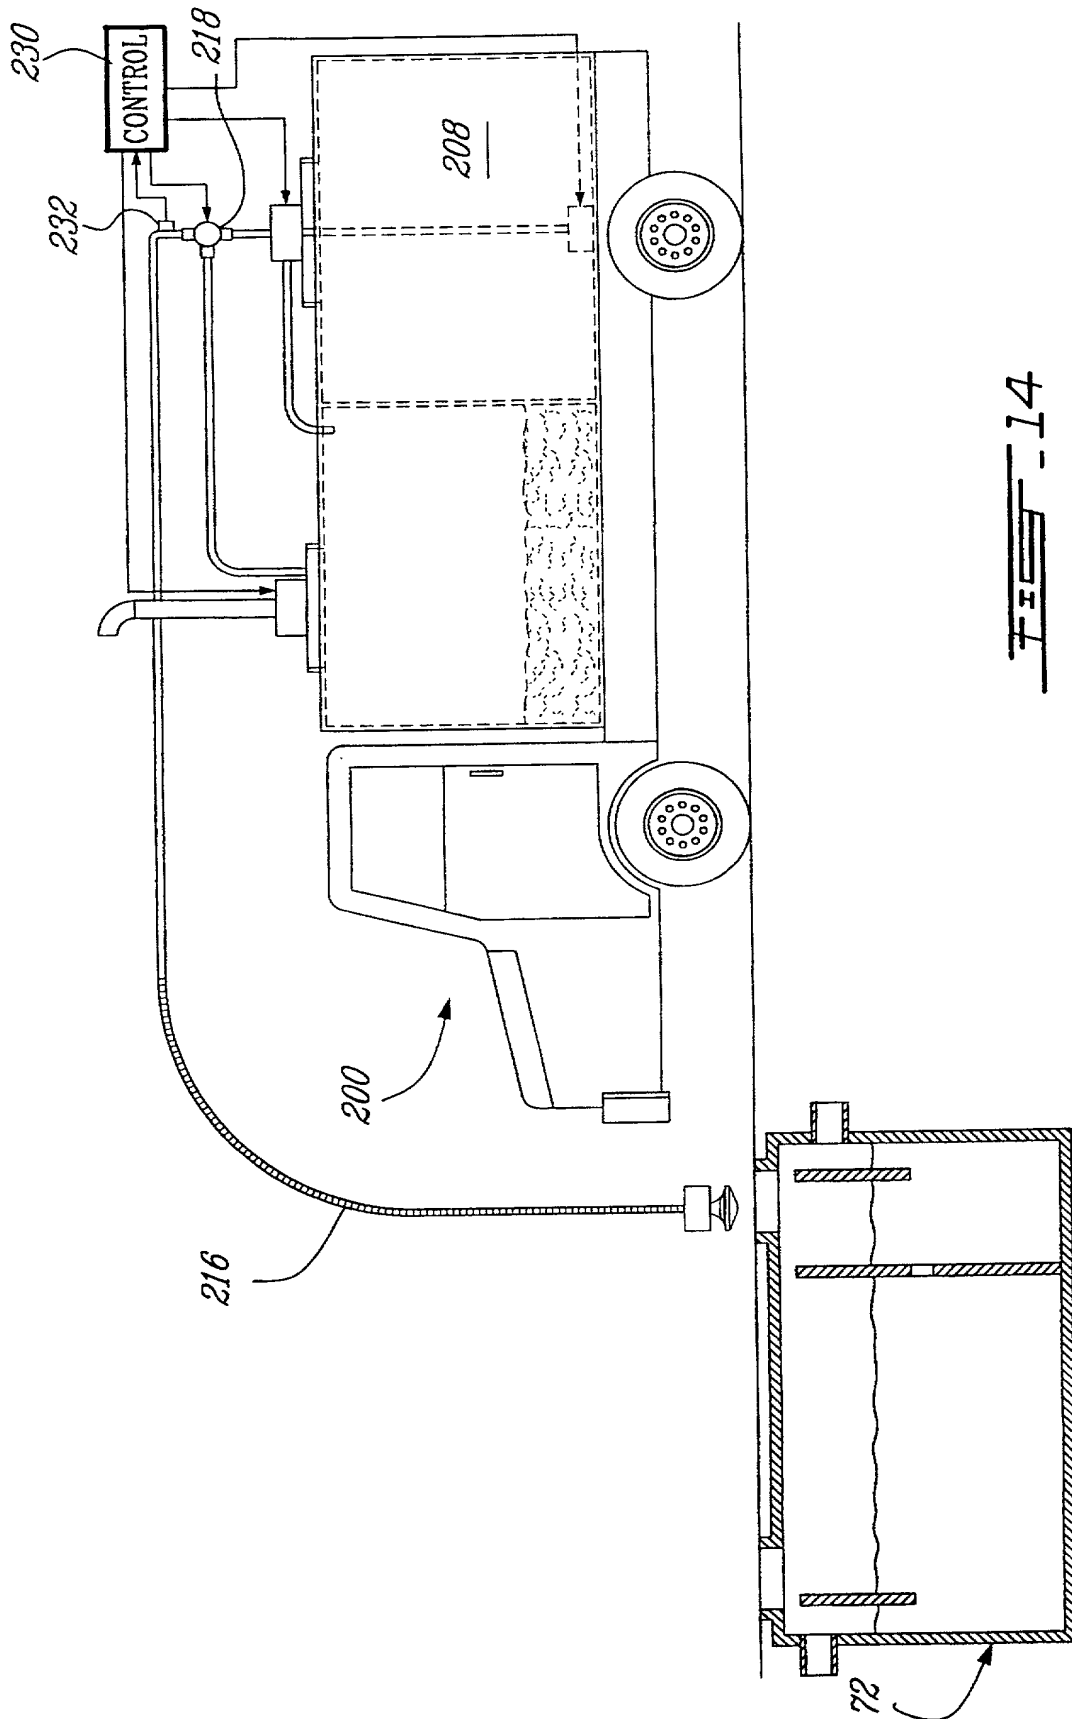


FIG - 14

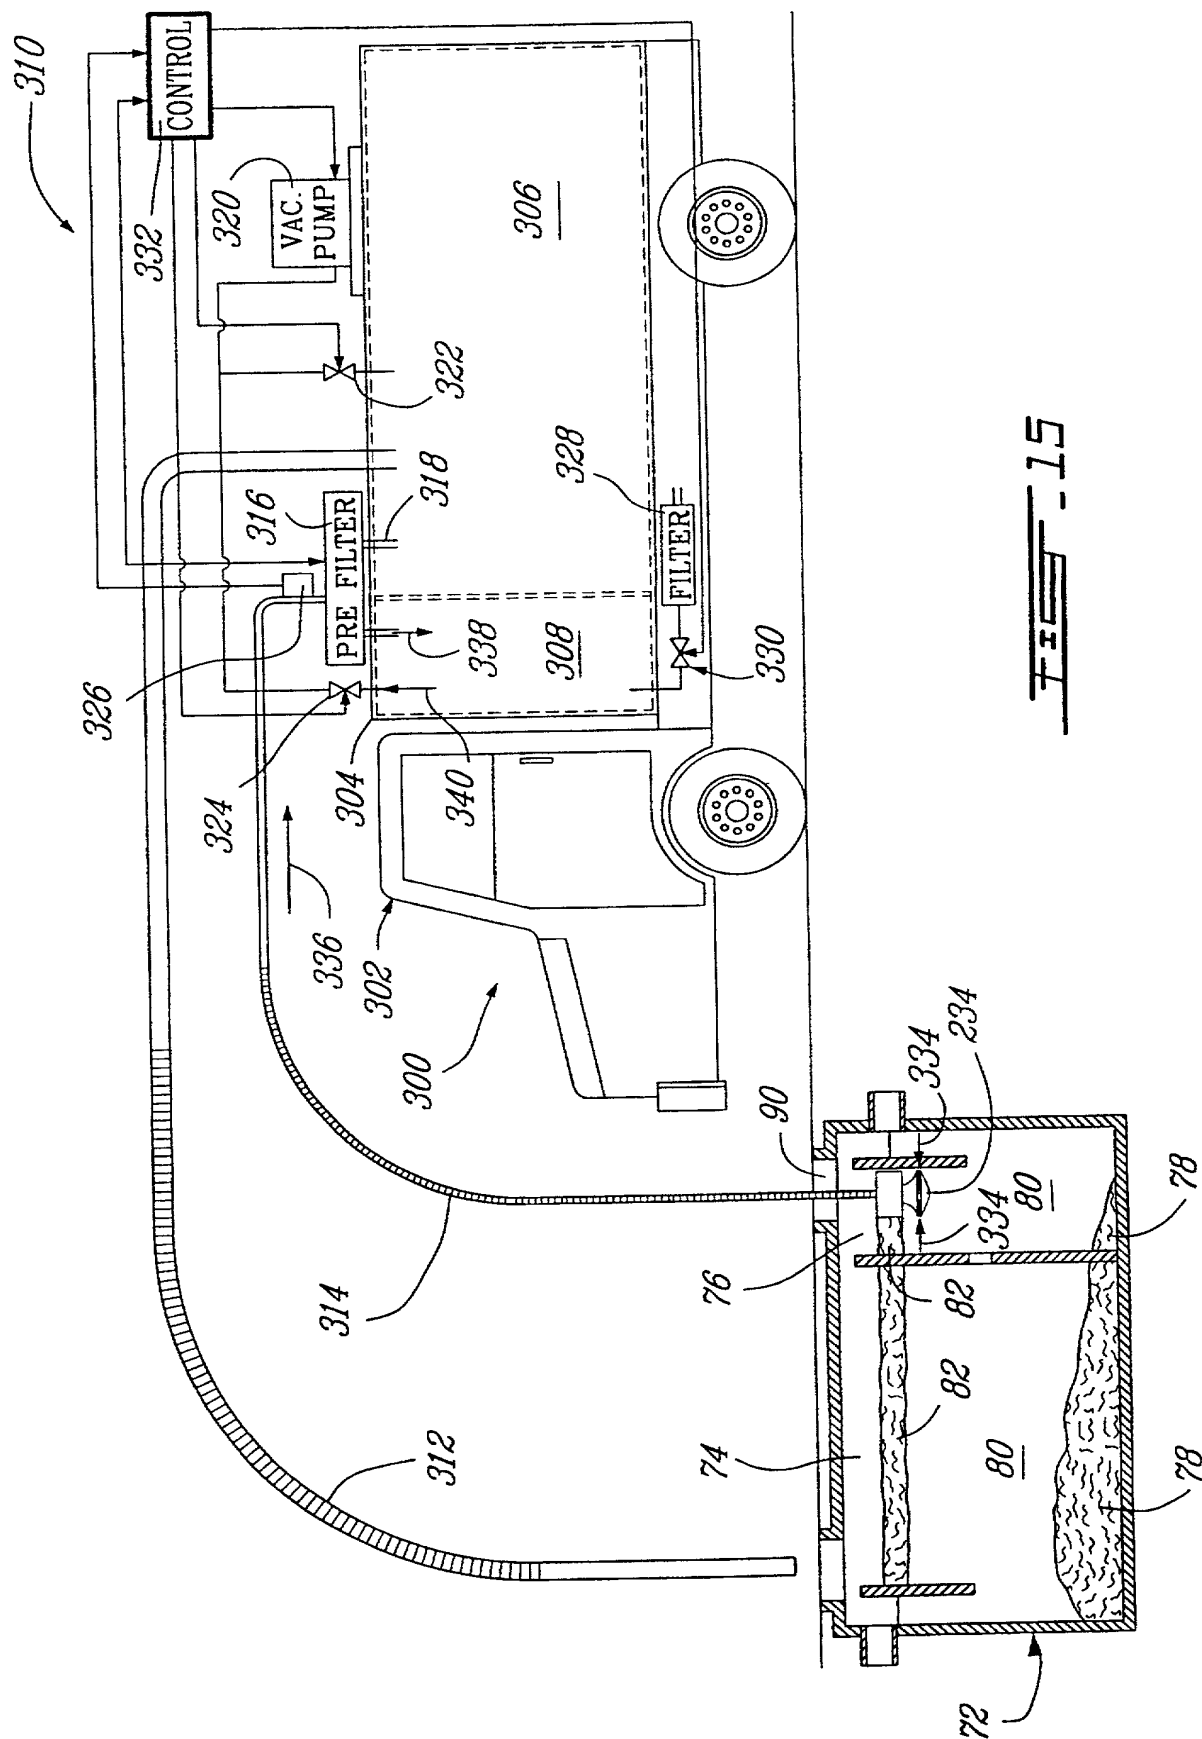

51-75

16/19

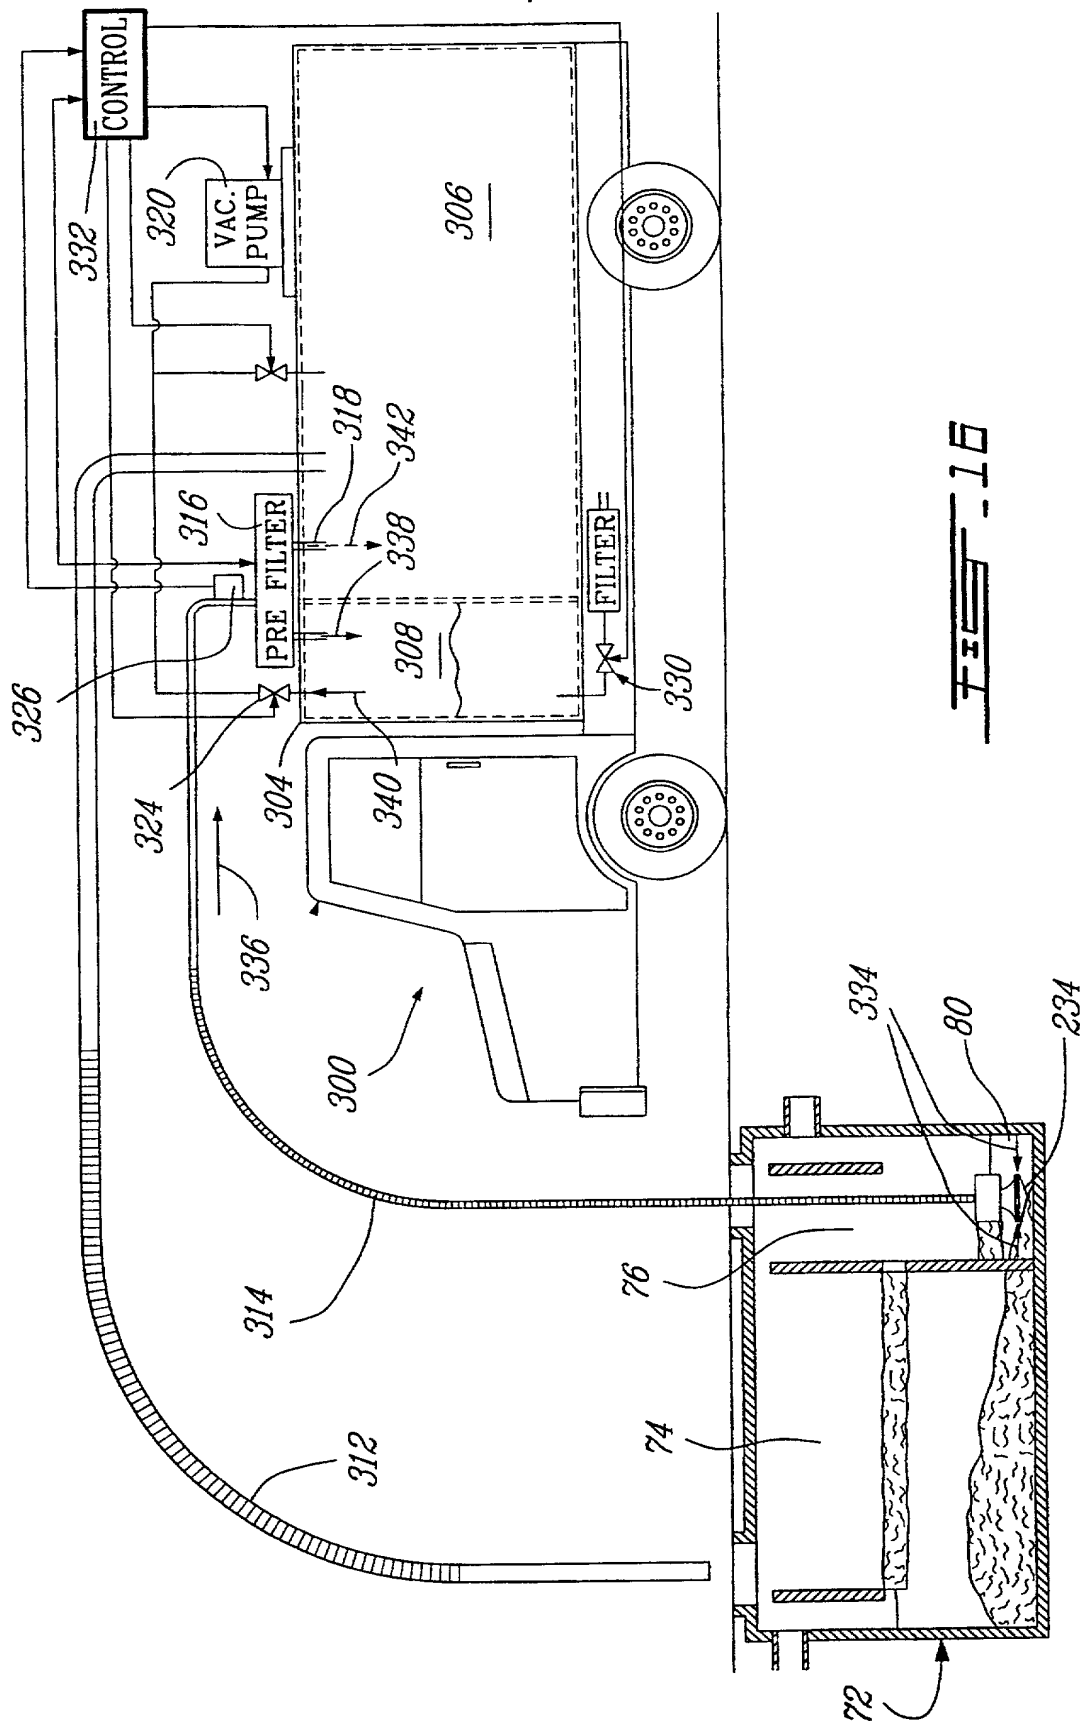


FIG. 16

17/19

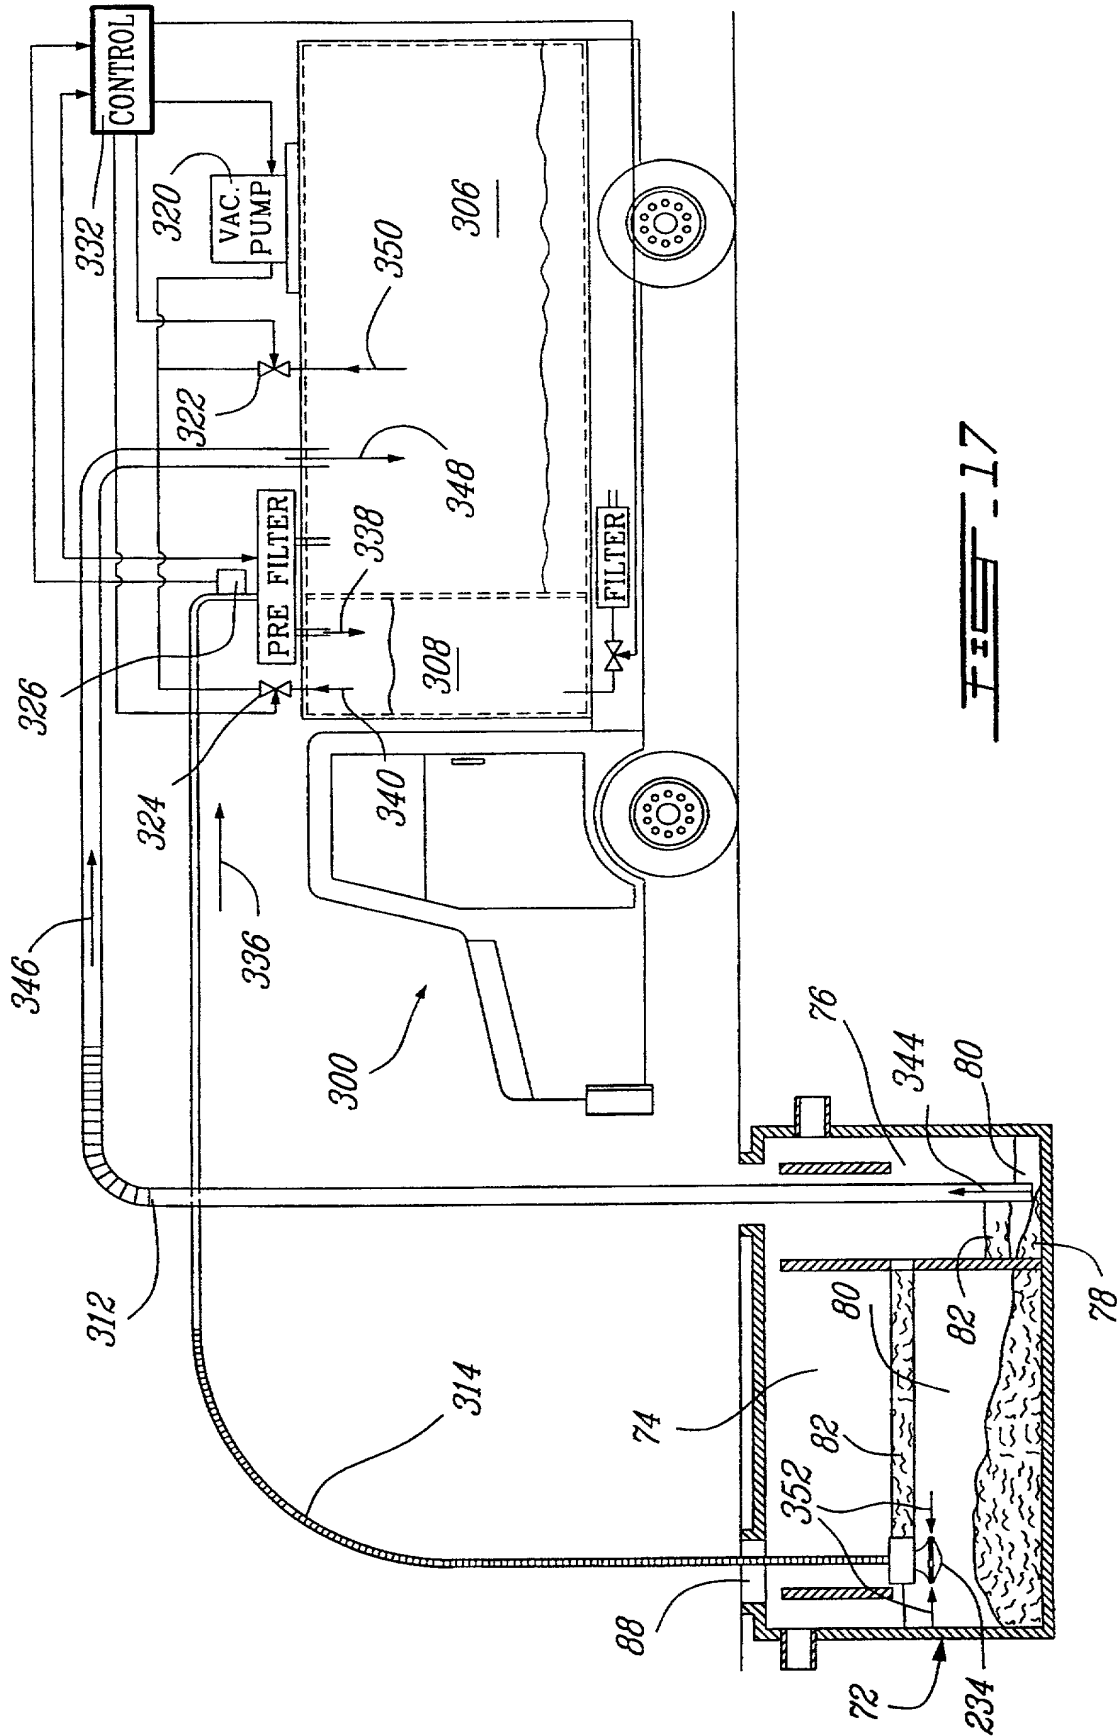


FIG. 17

FIG. 17 is a schematic diagram of the system.

18/19

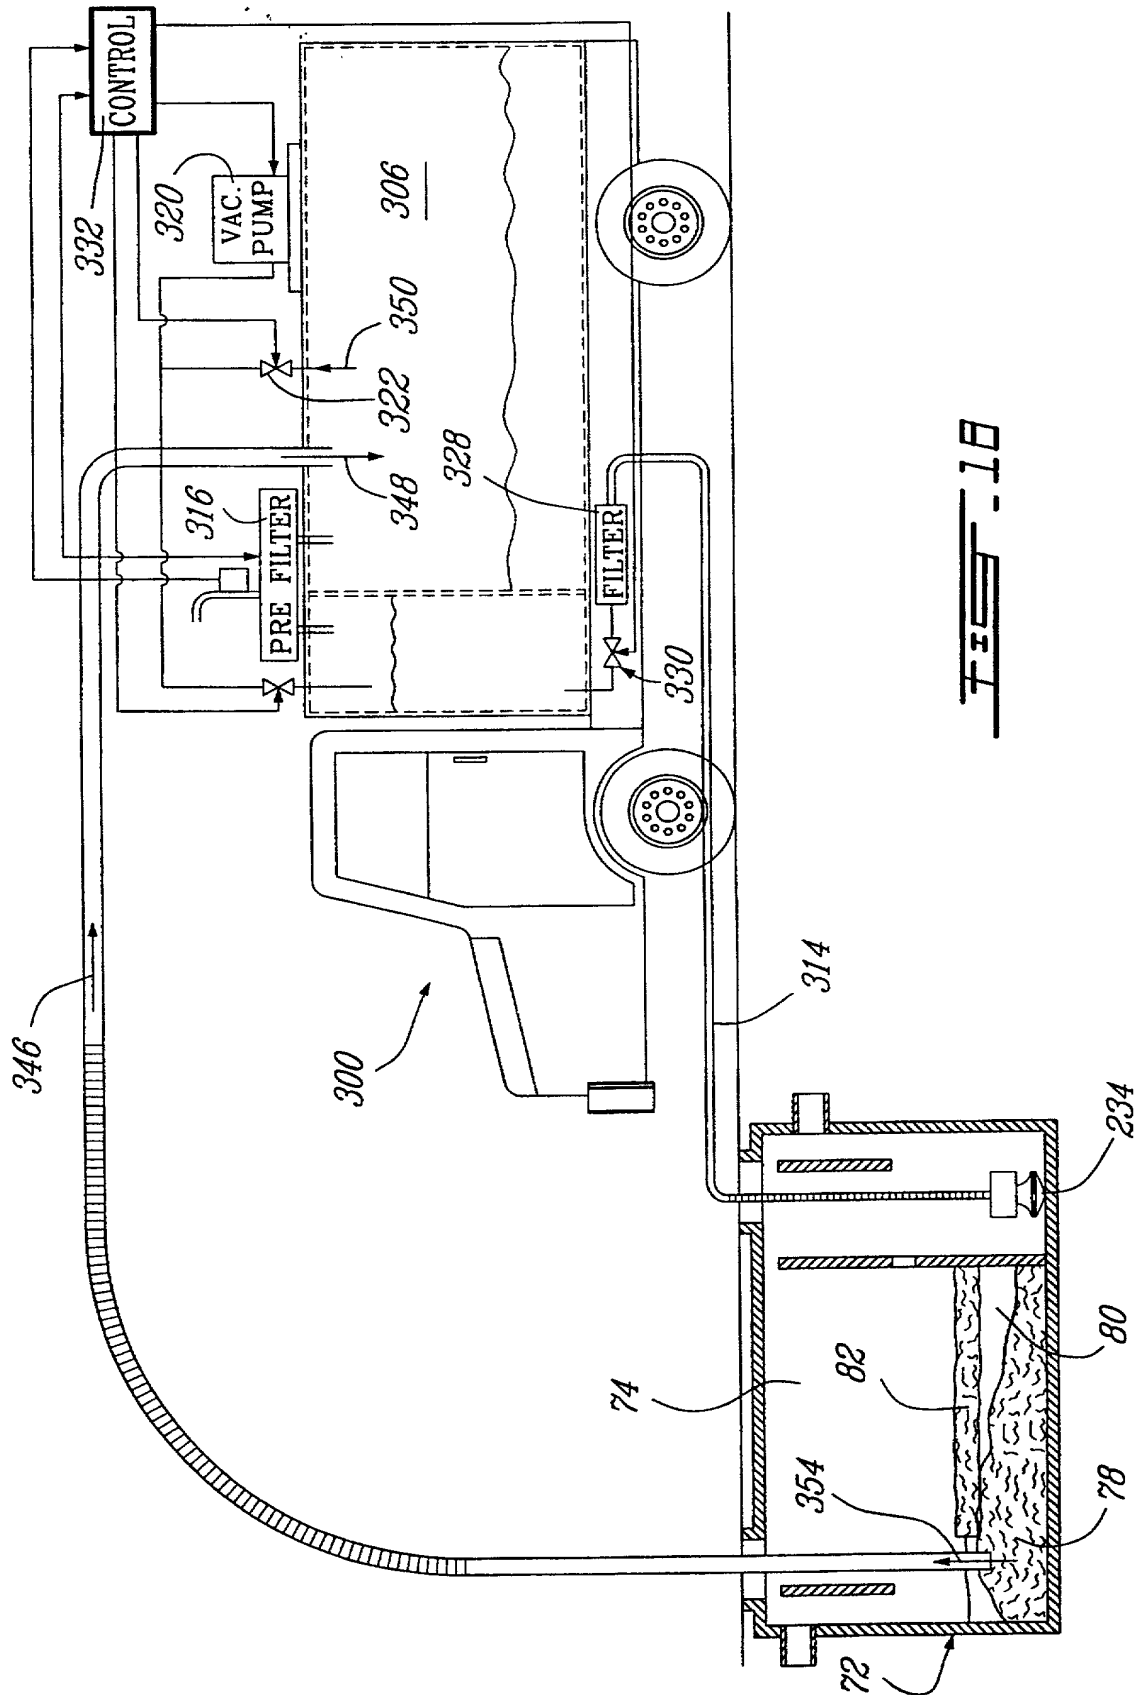


Fig. 18

FIG. 18 is a schematic diagram of a vehicle air conditioning system.

20080411 10:27:11

1U/049303

WO 01/11155

PCT/CA00/00908

19/19

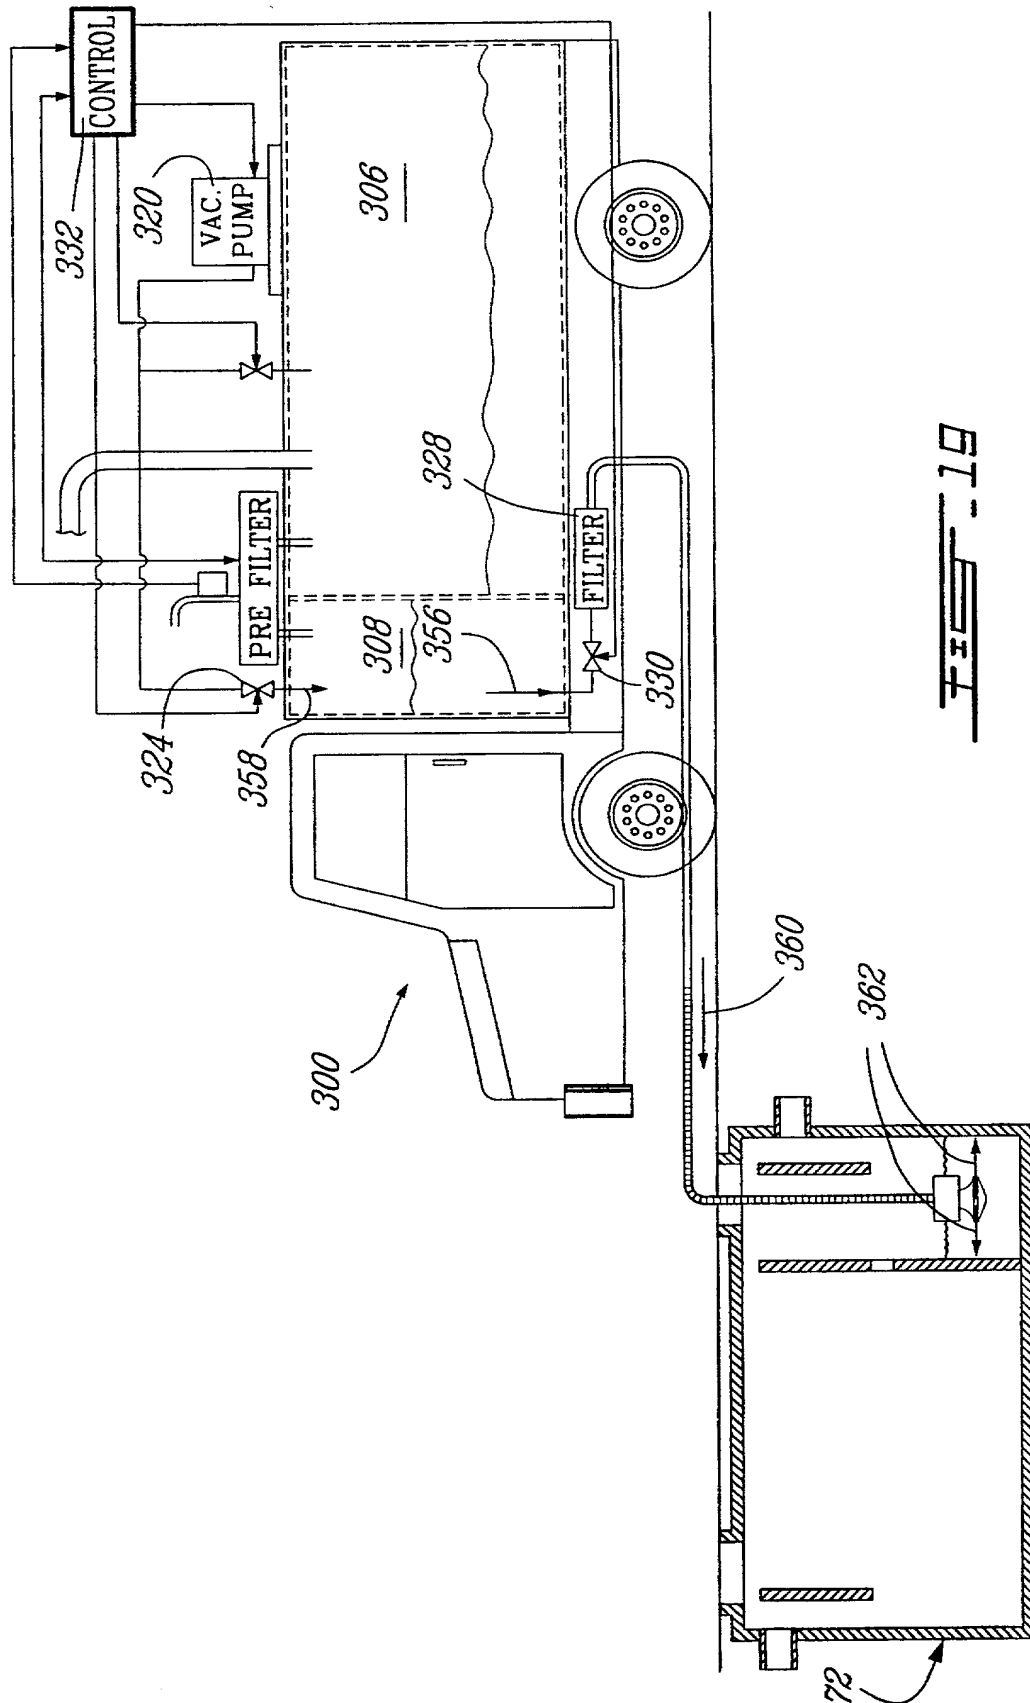


FIG. 19

ORUM & ROTH
INTELLECTUAL PROPERTY LAW
COMMERCIAL LAW
LITIGATION

53 West Jackson Boulevard
 Chicago, Illinois 60604-3606 U.S.A.

**DECLARATION FOR UTILITY OR
 DESIGN
 PATENT APPLICATION
 (37 CFR 1.63)**

OR	
Declaration Submitted with Initial Filing	Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number. 12888

First Named Inventor: VACHON, Tony

Application Number:

Filing Date:

Group Art Unit:

Examiner Name:

As a below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

METHOD AND SYSTEM FOR THE RECUPERATION OF SEPTIC TANK

(Title of the Invention)

the specification of which

is attached hereto

or

was filed on

(DD/MM/YYYY)

as United States Application Number or PCT International

Application Number

and was amended on

(DD/MM/YYYY)

(if applicable).

I hereby state that I reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365 (b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

209920" 5926400T

Prior Foreign Application Number(s)	Country	Foreign Filing Date (DD/MM/YYYY)	Priority Not Claimed	Certified Copy Attached? YES NO
PCT/CA00/00908	Canada	04 August 2000		x
2,279,697	Canada	06 August 1999		x

Additional foreign application numbers are listed on a supplemental priority data sheet attached hereto:

DECLARATION-----Utility or Design Patent Application

Direct all



correspondence to:

Customer Number

OR

Correspondence

or Bar Code Label

address below

Name: Orum & Roth

Address: 53 West Jackson Boulevard

City: Chicago

State: IL

Zip: 60604

Country:

Telephone: 312.922.6262

Fax: 312.922.7747

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

NAME OF SOLE OR FIRST INVENTOR: A petition has been filed for this undersigned inventor

Given Name

(first and middle (if any)): VACHON

Family Name

or Surname: Tony

Inventor's

Signature:  Date: 30 January 2002

CAX

Residence: City St. Joseph-de-Beauce State Quebec Country Canada Citizenship: Canadian

Mailing Address: 191 rue de la Gorgendière

City: St. Joseph-de-Beauce State: Quebec Zip: G0S 2V0 Country: Canada

NAME OF SECOND INVENTOR: A petition has been filed for this undersigned inventor

F223(Orum & Roth)

2-00
Given Name (first and middle [if any]) ... VACHON ... Family Name or Surname: ... Enck ...

Inventor's Signature [Signature] Date 30 Janvier 2002
CAX

Residence: City: .. Joseph-de-Beauce .. State .. Quebec Country: .. Canada Citizenship: .. Canadian

Mailing Address: ... 1180 Fleury ...

City: .. Joseph-de-Beauce .. State: ... Quebec Zip: ... G0S 2V0 Country: ... Canadian

Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) attached hereto